

**LOCATION-BASED NOVELTY INDEX VALUE AND
RECOMMENDATION SYSTEM AND METHOD**

5 This invention claims priority to U.S. Application Serial No. 10/024,282, filed December 21, 2001, entitled, "Location-Based Novelty Index Value and Recommendation System and Method," and which is incorporated herein by reference.

BACKGROUND OF THE INVENTION

10 Field of the Invention:

 The invention disclosed broadly relates to location services for handheld wireless devices and more particularly relates to improvements in the accessing of services based on the location or context of the wireless device, and further provides a system and method for providing recommendations on user location(s) and/or preferences.

15 **Background Art:**

 Mobile phones and wireless personal digital assistants (PDAs) are able to access the Internet using I-Mode protocol, mobile IPv6 protocol or the Wireless Application Protocol (WAP). WAP-enabled wireless devices can now access Internet applications such as headline news, exchange rates, sports results, stock quotes, weather forecasts, 20 multilingual phrase dictionaries, personal online calendars, online travel and banking services, or download distinctive ringing tones. Broadband wireless networks make it possible for WAP-enabled wireless devices to exchange multimedia messages that combine conventional text with much richer content types, such as photographs, images, voice clips, and video clips. WAP-enabled wireless devices can be used to pay bills 25 online using the wireless device as a virtual wallet. WAP-enabled wireless devices can deliver useful and informative advertising and transaction services from online merchants. WAP-enabled wireless devices now also provide entertainment services, such as interactive adventure games, quizzes, and chess tournaments.

People tend to travel over the same paths from day to day. They follow their daily routines by going to work, coming back home, putting children to day-care and getting food from a local shop, etc. Using uncommon routes or travelling to places that are not part of the daily routines can be considered as exceptions. More and more, people are

5 carrying handheld wireless devices as they carry on their daily routines, so as to remain in contact with home, work, and on line services. What is needed is a location service for handheld wireless devices, to enable users to create augmented reality services by setting up virtual environment that uses real-world locations. What is needed is a way for a

10 mobile device/phone user to access the augmented reality services by moving inside the service's "real world" location. Another challenge of augmented reality systems is the placement of the augmented data. When using absolute locations for the augmented data, most users won't find some of the augmented data or may find it too easily because of daily routines.

What the prior art needs is a way to personalize the augmented reality services for

15 each user so that the applications will know how novel each location is for the user by using methods and services described in this invention. By personalizing the augmented reality data for each user, it is possible to create an augmented reality that reaches each user in a manner that is more consistent with the spirit and scope of augmented reality systems and services.

20 Recommendation systems use information of the activity histories or preferences of numerous users to produce useful recommendations for a single user. Existing recommendation systems use collaborative filtering methods to produce recommendations for an individual user by analyzing the actions and preferences of a group of individuals. As the use of information technology has become widespread in all

25 areas of human life, the concerns of individuals over their privacy have increased. Specifically, most distributed recommendation systems were developed for wireline Internet services, and the privacy concerns will significantly increase as the services are adopted for use by more personal, wireless devices.

What is needed is a distributed recommendation system for handheld wireless

30 devices, to enable users to access recommendation services by moving inside the service's

real world location. It would further be useful to enable third parties to access information which is a function of the wireless device's location.

SUMMARY OF THE INVENTION:

5 The invention is a method for computing a result for a location, the result depending on how novel it is for a wireless device to occupy the location. In one embodiment of the invention, the method begins with the step of determining the location of a wireless device. Then, in accordance with the invention, the method computes a novelty index value for the location, characterizing how novel it is for the wireless device to occupy the location, and stores the novelty index value in a database. The method then
10 runs a program to determine a result that depends on the novelty index value. To do this the method accesses the database for information associated with the novelty index value and then computes the result using the information. In a preferred embodiment, the database can be an integral part of the wireless device. In an alternate embodiment, the database can be in a server, remote from the wireless device.

15 In another embodiment of the invention, a method enables the wireless device to provide recommendations to its user that are appropriate to the device's current environment. The recommendation can be in the form of mobile Internet WML pages of a portal, or other service provider. The method begins by receiving sensor signals characterizing a current environment of the wireless device, processing the sensor signals
20 with a context inference engine, and then outputting a current context result from the processing by the context inference engine. Then, in accordance with the invention, the method computes a novelty index value for the current context result, characterizing how novel it is for the wireless device to occupy the current context and stores the novelty index value in a database. The method then runs a program to determine a result that
25 depends on the novelty index value. To do this the method accesses the database for information associated with the novelty index value and then computes the result using the information.

In still another embodiment of the invention, a method computes a result for a location, the result depending on how novel it is for a wireless device to occupy the
30 location. The method begins by determining the location of a wireless device. Then, in accordance with the invention, the method computes a novelty index value for the

location, characterizing how novel it is for the wireless device to occupy the location and stores the novelty index value in a database. The method then runs a program in a second terminal to determine a result that depends on the novelty index value. It does this by accessing with the second terminal the database for information associated with the
5 novelty index value and computing the result using the information.

In yet another embodiment of the invention, a method changes a wireless device configuration for a location, the configuration depending on how novel it is for the wireless device to occupy the location. The method begins by determining the location of a wireless device. Then, in accordance with the invention, the method computes a novelty
10 index value for the location, characterizing how novel it is for the wireless device to occupy the location and stores the novelty index value in a database. The method then runs a program to determine a result that depends on the novelty index value. It does this by accessing the database for information associated with the novelty index value. The method then changes a configuration of the wireless device using the information.

One aspect of the invention is personalizing the augmented reality services for each wireless device user. This enables applications to know how novel is each location traversed by the user. The novelty value of a location traversed by the user is calculated by using the travelling and moving in real world as input. The definition of the location can be defined in various different ways, such as coordinate based (GPS), proximity based
15 (Bluetooth, proximity sensor) or cell based (triangulation methods with mobile networks). The location coordinates are trimmed into coordinate grid that is described for this invention.

Other services can query Novelty Index Value databases (NIV) for detecting the suitable placements for augmented data. An augmented reality application processes the
25 data and can determine which data can be accessed more easily and which data should be hidden or harder to find. This information can be then converted to NIV queries that are sent to the system. The NIV system would then return a set of suitable locations according to the user NIV values.

The accumulation of NIVs during a certain time period or between certain
30 locations is also utilized under an embodiment of the present invention. For instance, when a user is using identical routes while moving, the user does not accumulate NIV

values. However, when a user is moving between places by using different routes or paths, and rarely traversing across old routes, a very large NIV value will accumulate for that user.

5 This information can be used for creating a personalized augmented reality for each user, where uncommon behavioral patterns in travelling from place to place is registered through NIV values. The NIV values can also be used for controlling various features in augmented reality applications. The NIV feature may also be combined, or run independently with a recommendation service to provide users with a variety of browsing or file-accessing options.

10 The invention applies to many wireless standards. The invention applies, for example, to the IEEE 802.11 Wireless LAN standards, the Japanese 3rd Generation (3G) wireless standard, the various 2G, 2.5G, and 3G cellular telephone system standards, the Infrared Data Association (IrDA) standard, the Digital Enhanced Cordless Telecommunications (DECT) standard, the Shared Wireless Access Protocol (SWAP)
15 standard, the IEEE 802.15 Wireless Personal Area Network (WPAN) standard, the High Performance Radio Local Area Network (HIPERLAN) standards, and the Multimedia Mobile Access Communication (MMAC) Systems standard of the Japanese Association of Radio Industries and Businesses.

DESCRIPTION OF THE FIGURES:

20 **Figure 1** discloses an exemplary mapped grid under an embodiment of the present invention;

Figure 1A discloses a combination network diagram and device appearance diagram for a wireless device utilizing a NIV distribution network;

Figure 1B illustrates a sprocess diagram showing a recommendation network
25 process among a user device, a network server and a third-party merchant;

Figure 2 discloses an application using a exemplary mapped grid under an embodiment of the present invention;

Figure 2A discloses a superimposed map on a exemplary mapped grid under an embodiment of the present invention;

Figure 3 discloses a system architecture under an embodiment of the present invention;

Figure 4 discloses an embodiment of the invention showing a user screen using a NIV device configuration;

5 **Figure 4A** discloses an embodiment of the invention showing a user screen using an altered NIV device configuration;

10 **Figure 5** is a network diagram of the invention, showing an example relationship between the user's Wireless Application Protocol (WAP)-enabled portable wireless device, the WAP protocol gateway to the Internet, the network server, a third party service provider, the Universal Description, Discovery and Integration (UDDI) registry, and a plurality of web sites;

Figure 6 discloses an embodiment of the invention wherein a user recommendation database is located within a wireless device;

15 **Figures 6A and 6B** show the user's wireless device with the UPDATE PRIVACY FEATURES: sub-menu of the Recommendation Web Services menu;

Figures 6C and 6D show the user's wireless device with the MANAGE CONTEXT-ACTIVITY PROFILE sub-menu of the Recommendation Web Services menu;

20 **Figures 6E and 6F** show the user's wireless device with the REQUEST A RECOMMENDATION sub-menu of the Recommendation Web Services menu;

Figures 6G and 6H show two examples of the user's wireless device with a requested context-activity pair which is sent to the network server and the resultant service recommendations received back from the server;

25 **Figure 7** is a functional block diagram of the wireless device, showing its various components and programs;

Figure 7A is a functional block diagram of the wireless device, the server, and the web server 160, and their interaction when exchanging a metadata vector and privacy control data and when exchanging a context-activity pair and associated recommendations;

Figure 8 is a network process flow diagram of the interaction of the wireless device, network server, and web server when carrying out the determination of the current context of the wireless device;

5 **Figure 8A** is a network process flow diagram of the interaction of the wireless device and network server when the user's wireless device sends a requested context-activity pair which is sent to the network server and the resultant service recommendations are received back from the server;

Figure 8B shows the context-pairs and services database in the network server;

Figure 8C shows the context-pairs and service history log in the device;

10 **Figure 8D** is a network process flow diagram of an alternate embodiment of the invention, in which the context-activity pair information sent by the wireless device to the network server, includes a metadata vector. The network server can then assist the wireless device in determining the mobile device's current context, as well as the server sending the resultant service recommendations back to the wireless device;

15 **Figure 8E** is a network process flow diagram of an alternate embodiment of the invention, in which a recommendation algorithm in the server receives a sample of representative context-activity pairs filtered by algorithm and related service history items from log as a set of context-activity pairs and related service history items;

20 **Figure 9** is a functional block diagram of the network server 140, showing the memory storing the application services software programs needed to perform the operations of the invention.

Figure 10 discloses an embodiment of the invention wherein a server distributes services to communications network users.

DISCUSSION OF THE PREFERRED EMBODIMENTS:

25 In the following description of the various embodiments, reference is made to the accompanying drawings that form a part hereof, and in which is shown, by way of illustration, various embodiments in which the invention may be practiced. It is understood that other embodiments may be utilized, and structural and functional

modifications may be made without departing from the spirit and scope of the present invention.

The invention is based on methods for computing results for a location, wherein the results depend on how novel it is for a wireless device to occupy the location. In one embodiment of the invention, the method begins with the step of determining the location of a wireless device. Then, in accordance with the invention, the method computes a novelty index value for the location, characterizing how novel it is for the wireless device to occupy the location, and stores the novelty index value in a database. The method then runs a program to determine a result that depends on the novelty index value. To do this the method accesses the database for information associated with the novelty index value and then computes the result using the information.

One aspect of the invention is personalizing the Novelty Index Value (NIV) services for each wireless device user. This enables applications to know how novel is each location traversed by the user. The novelty value of a location traversed by the user is calculated using real world inputs. The user input or location can be defined in various ways, such as coordinate based (GPS), proximity based (Bluetooth, proximity sensor) or cell based (triangulation methods with mobile networks). The location coordinates are trimmed into various numbers of coordinate grids that are described in greater detail below.

An example of an NIV layout is shown in **Figure 1**. The mapping of NIV values may be provided for in a location grid layout **10**. It is understood that alternate layouts may be employed under the present invention, such as circular, triangular and even layered grids. In **Figure 1**, the exemplary grid **10** illustrates a defined area that is partitioned off into regions, blocks, or sets. As the client location is established **12**, it may then be mapped out on the location grid **10**. The invention may then partition regions near the client location **12**, in accordance to the NIV value. For example, in **Figure 1**, the clear blocks **14** illustrate common travel areas, where the client frequently occupies. Such regions **14** would be designated a low NIV value ($NIV=0$). Other regions **11** may also be designated, for example, as less frequented areas, where the NIV value would be in the region of $0 < NIV < MAX$. Still other regions **13** may be designated as areas not visited by the client ($NIV=MAX$).

Figure 1A is a combination network diagram and device appearance diagram for the wireless device **100** as used in the novelty index value (NIV) distribution network. As shown in **Figure 1A**, the wireless device **100** has presented on its browser **102**, a novelty index value services menu. The novelty index value services menu includes options that the user can select, including (A) *TURN ON SENSORS TO UPDATE NIV*; (B) *ENTER QUERY BASED ON NIV*; and (C) *REQUEST NIV RECOMMENDATION*. If the user has selected item (C) *REQUEST NIV RECOMMENDATION*, then a sub-menu is presented for the activity category of the recommendation. The user then enters a selection of either (1) *SHOPPING (FAMILIAR OR NEW)*; (2) *TRAVEL (POPULAR OR NEW AREA)*; and (3) *RESTAURANTS (POPULAR/PRIVATE)*.

Figure 1B illustrates the novelty index value data gathering and novelty index value-based recommendations network process diagram. The network process diagram of **Figure 1B** is divided into three columns: user's device **100**, network server **140**, and a third party merchant **180**. Reference back to **Figure 1A** illustrates that in a network, the wireless device **100** communicates over a radio frequency link to a radio tower **114** that is connected by means of the wireless network **116** and through a gateway **120** to the Internet **130**. Connected to the Internet **130** is a network server **140**, which is represented by the center column in **Figure 1B**. Also connected to the Internet **130** is the third party service provider or merchant **180**, which is represented in the rightmost column of **Figure 1B**. The wireless device **100** is represented in the leftmost column of **Figure 1B**.

In accordance with the invention, as the user travels about various routes during the day, the wireless device **100** periodically transmits information on the current context of the wireless device **100**. That current context information is transmitted from the wireless device **100** through the Internet **130** to the network server **140** and is stored in a novelty index value database **40**. This stage of the network process is shown in **Figure 1B** beginning with step **50**, where the wireless device **100** automatically obtains the current context state of the wireless device and transmits it to the network server **140**. If the user has indicated an interest in a particular activity (e.g., shopping, travel, restaurants) at that particular location or context, then that activity category is also transmitted to the network server **140** to be associated with the current context. As is seen in **Figure 1B**, step **52** is performed by the network server **140** wherein the server periodically receives the context state, and further computes the novelty index value (discussed in greater detail

below). Thereafter, the network server **140** associates the computed novelty index value with the user's activity and stores that information in the novelty index value database **40**.

In the meantime, the third party merchant **180** compiles pricing, promotions, and discount information which the merchant wishes to associate with particular novelty index values for a particular user or groups of users. For example, if a prospective customer has never been to the merchant's store, the merchant may want to offer the new customer special discounts, pricing or promotions. The merchant in step **54** of **Figure 1B**, stores the compiled pricing, promotion and discount information which has been associated with respective novelty index values, in the novelty index value database **40**. To do this, the merchant **180** may communicate over the Internet **130** and through the network server **140** with the novelty index value database **40**, shown in **Figure 1A**.

During the course of traveling throughout the day, a user may wish to obtain a recommendation, for example, of shopping opportunities at a shopping mall. Accordingly, the user selects on the wireless device **100** of **Figure 1A**, the entry (C) *REQUEST NIV RECOMMENDATION*, and this is followed by the selection of the sub-menu (1) *SHOPPING*, wherein the user selects new shopping opportunities. Step **56** in **Figure 1B** has the wireless device **100** receive the user's selection from the keypad **104** of the device, the user having input the activity category *NEW SHOPPING* of the recommendation that the user wishes to receive from the NIV network. At the same time, the wireless device **100** interrogates sensors shown in **Figure 1A** to compile the current context state for the wireless device **100**. The current context state can be as simple as to be directly in conjunction with the geographic location of the wireless device. However, many other ambient signals can be assembled to prepare a more detailed context characterizing the current location of the wireless device. For example, in addition to positioning, information on the ambient sounds, on the orientation of the device, on the ambient light, on the ambient temperature, and other physical environmental values can be gathered by the sensors of the wireless device **100** and assembled into a current context state. A detailed description of how a current context state is computed with the wireless device **100** is given below. It is also understood that the example given of the embodiment is not limited to merchant recommendations and services, but may also be configured to provide news, information, or other similar content.

Step 56 then transitions to step 58 in **Figure 1B**, where the context-activity pair and other information generated by the algorithms 112 (**Figure 1A**) stored in the wireless device 100 are transmitted to the server 140. Then, step 60 in **Figure 1B** has the network server 140 match the context activity pair received from the user's device 100 in a context activity database 192 which has accumulated past context activity pairs. Details of the context activity pair database 192 are provided below. The network server 140 matches the past context activity pairs in the database which are similar to the context activity pair received from the user's device 100 and in response to the search and match, gets the associated novelty index value.

Over the course of using the device 100, the user may make repeated entries of activities of interest. Those activities of interest are correlated with the currently measured context of the device 100, and these context activity pairs are periodically transmitted and stored at the network server 140. The network server 140 stores the context activity pairs in association with the novelty index values in a novelty index value database 40. It is from this database 40 that the network server 140 obtains the novelty index value for the nearest match.

The novelty index value for the nearest match in step 60 is then transmitted from the network server 140 to the third party merchant 180, where, in step 62, the merchant 180 receives the novelty index value. In step 62, the merchant accesses the corresponding pricing, promotions and/or discounts from the merchant's database. The merchant also accesses pricing, promotions and/or discounts corresponding to the novelty index value received from step 60, from the network server 140. Then the process flows to step 64 where the third party merchant 180 returns the pricing, promotions, and/or discount recommendations to the network server 140. Step 66 in the network server 140 of **Figure 1B** then transmits the associated recommendations to the device 100.

Step 68 of the user's device 100 in **Figure 1B** receives the associated recommendations from the network server 140 and then performs a filtering operation of the received recommendations to identify new and/or significant information. Additional description of this step is provided below. Then the process flows to step 70 wherein the user's device 100 displays the filtered recommendations to the user, as requested. For example, if the user is traveling to a new shopping mall and has entered the shopping

mall, the merchant or merchants **180** in the shopping mall can provide appropriate pricing, promotion and/or discounts to the user based on a user's NIV value. Thus a high or low NIV value could trigger special offers from the merchants.

Step **70** in **Figure 1B** can also transfer these recommendations to an application
5 program for further processing. An additional feature of the invention is shown in **Figure 1B** where the network server **140** transitions from step **66** to step **72** which adds the new context activity pair and recommendations to the database **192**. The process then flows to step **74** which computes user statistics for the context activity pairs and recommendations in the database **192**. This can become another source of revenue for the network server
10 **140**, because the usage statistics can then be marketed to third party merchants such as the merchant **180** who would, in step **76** of **Figure 1B**, purchase selected data sets from the database **192** for additional market research purposes. In an alternate embodiment of the invention, step **58** can transmit the context activity pair and information gathered by the algorithms **112** to the server using user privacy protocols.

15 It is understood that the NIV value is capable of being combined or calculated along with other factor values that are provided from sensors that are communicatively coupled to the device. The sensor information would be particularly useful for merchants to learn with greater specificity the reasons behind particular NIV values. Since a user's NIV may be unrelated to reasons of commerce (e.g., a shop is located nearby a user's bus
20 terminal), it would be important to give the owner additional sensor information to better understand the user's behavior. For example, ambient temperature/pressure/humidity, ambient noise, compass, ambient light, wireless device activity, etc. may all be combined in various forms to add context to a NIV reading.

An application of a grid that would be used to establish NIV values is shown in
25 **Figure 2** in the context of an augmented reality shopping space. Under the embodiment, the augmentations are customized according to user's moving behavior between places. Some of the augmentations are located in the common traveling routes **14**, where a user's routes are established. A shopping center or a virtual trading place **17** is affixed to the grid, where the user may buy or sell items. Some of the augmentations may also be
30 promotional items **15** and placed outside the common walking routes **11**, **14**. The promotional items may be evident to the user, or may be affixed in secret, where the user

would have to solve a series of clues or hints **16** in order to find and redeem the promotional item **15**. Thus the NIV values can also be used as elements that control the nature of the grid. For instance, in the virtual trading place **17**, the prices might follow the NIV value of the location so that the prices are higher when the user visits the place often and when he/she does not visit the place for a while, the prices will go down again.

A user can also be categorized according to the location occupied by the user. If a user goes to a shopping mall often, the user's NIV value for that area will be small. The small NIV value would qualify the person to be categorized as a regular customer by the shop or mall that the user visits. As a result, the shop or mall may authorize the user for special discounts or bonuses. On the other hand if the user has a high NIV value (i.e., the user is not a regular customer), the mall or shop may offer introductory discounts to entice the user to physically visit the store. By monitoring such changes in the user NIVs, the shop gains valuable information on user interests towards the shop, or whether that interest is rising or falling.

An example of a "real-world" application is illustrated in **Figure 2A**, where the grid **10** is superimposed on a walkway or road **19** and the surrounding geographical area **18, 20**. The geographical maps may be developed on a proprietary basis, or may alternately be acquired from existing electronic mapping services. Assuming in **Figure 2A** that the geographical areas are a mall **18** and a strip mall **20**, shop owner's in the mall **18** or strip mall **20** may monitor customer movements, and apply any commercial incentives (e.g., regular customer discounts or introductory discounts) to the customers.

In another embodiment of the invention, a method runs a program in a second terminal to determine a result that depends on the novelty index value. It does this by accessing with the second terminal the database for information associated with the novelty index value and computing the result using the information. Multiple external users may monitor the NIV value of a particular user as well. Monitoring by other users requires that the NIV-database be accessible to the other users. This feature can also be built into the device itself, or may be set in a remote device or location. For example, the device can monitor the NIV-value, and if the value has been MAX for a predetermined period of time (meaning the user has been in a new area), a notification signal is transmitted to a remote device.

An alternate application can be set in the context of a child-monitoring system. Parents are usually very worried about their small children, so the system can be used to warn parents when the child goes into an area that the child has previously not visited. If the NIV has been at a large value MAX for a short while, the child might be classified as lost and a phone call may be automatically initiated. The system can thus act as a care-taker when the parent cannot be with the child. This embodiment helps users monitor travelling behavior to learn how novel a place is relative to the user being monitored. The augmented reality services can further use this information to customize and/or build the augmented data inside and around the user's common routes. Thus parents or teachers will be enabled to monitor children according to school property boundaries or travelling paths. Children that stray beyond permitted limits would set off an alarm to notify the parent or teacher that a travelling violation has occurred.

Figure 3 discloses an embodiment of the system architecture of the present invention. Disclosed is a NIV database 40, which may transmit NIV values for processing to NIV Program Tools 42. The NIV Tools 42 are preferably disposed in a Network server 140 (shown in Figure 5), or may be partitioned off in a wireless device. An application program 44, preferably disposed in the wireless device 100, utilizing the NIV system may transmit NIV queries through the NIV Tools 42, wherein the Tools 42 send back the requested information. Updates from the Database 40 are transmitted to NIV Event Handles 41, which are in contact with Location Service 43. Both the Location Services 43 and the Applications Program 44 may be set within the user's wireless device 100 as well.

The NIV is typically configured so that when NIV "events" occur, a system response is requested or automatically invoked. These events include a user entering a location (*enter_loc*), leaving a location (*leave_loc*), or returning to a location (*update_loc*). The NIV is defined for each location based on information as to how often user has been in that location and how much time has passed since the previous visit to that location. Each location handles *update_loc* and *leave_loc* events per each user. When a user enters a location, the *enter_loc* event is triggered. When the location is departed, the *leave_loc* event is triggered. Each time the *enter_loc* is triggered, the current NIV is calculated for that location and user. If a location does not have a NIV

value, the NIV value is assumed as MAX. Each time the *leave_loc* is triggered the NIV value for the location and user is updated and the NIV value is marked with a time stamp using a global time notation, such as UTC. The time is converted to values that can be used in base 10 calculations, such as expressing a time differ in seconds using a date
 5 1/1/2000 and a time 00:00.00.

The database uses the location grid to reduce the amount of NIV data that is utilized by the system at one time. When a *enter_loc* or *leave_loc* event is sent to the NIV system, it trims the location coordinates to the location grid. The size of one location is defined in the top level of the NIV database, with a default value set under
 10 *location_grid_size*. The location grid size can be chosen according to the error tolerance of the location service and amount of storage space available for the data. To further illustrate an embodiment of the present invention, the text below and the associated tables discuss a method of utilizing the NIV system in the embodiment.

Typically, the system's data collection works through the following steps: (1) the
 15 device obtains the user's location (e.g., GPS); (2) the location is sent to the NIV system; and (3) the NIV system trims the location to its location grid and updates the user's current grid value. Regarding system queries, the query is typically sent to the NIV system, where the NIV system processes replies to the query accordingly. An example of the events utilized in the system is tabulated below:

20 **[1] EVENT: *update_loc(user,location,time)***

$NIV_{(user,location)}$	Updated NIV value
$NIV0_{(user, location)}$	Previous NIV value
NIV AGING RATE	The rate at which the NIV value is incremented over time, for the length of time the device is absent from the location.

$$NIV_{(user, location)} = [NIV0_{(user, location)}] + [\text{delta_time_absent}] * NIV_AGING_RATE$$

where

$$\text{delta_time_absent} = \text{current_time} - \text{time_last_updated}(\text{location}).$$

- In order to keep the NIV value within a prescribed grid, if the updated NIV value
- 5 $NIV_{(user, location)}$ exceeds the maximum value (MAX), the $NIV_{(user, location)}$ value is deleted from a NIV database. However, if $NIV0_{(user, location)}$ is not defined in the $NIV_{(user, location)}$ (i.e., the user is entering the grid for the first time), the NIV value is assumed as a value MAX. Furthermore, if user movements are not defined for the location, it is assigned a default value NIV_AGING_RATE.

10 **[2] EVENT: leave_loc (user, location)**

<NIV_rate_decrease>	The rate at which the NIV is decreased in value each time an <i>enter_loc</i> event occurs
<NIV_rate_increase>	The rate at which the NIV is increased in value in the absence of an <i>enter_loc</i> event.
<MAX>	The maximum NIV value
<User>	The user ID
<Accumulation>	Accumulated NIV values
<NIV data>	The NIV data

$$NIV_{(user, location)} = NIV0_{(user, location)} - NIV_rate_decrease.$$

In addition to users entering and leaving a location, it becomes important to determine what to do with the NIV values once the users occupy (or fail to occupy) a particular space in the grid. When a device obtains a NIV from a highly frequented area (e.g., the home or office), the NIV values may be disproportionately low relative to other areas visited by the user. In such instances, the *NIV_rate_decrease* may be used in conjunction with, or independently from the *NIV_aging_rate* to establish NIV values. Typically, if the updated NIV value $NIV_{(user, location)}$ exceeds its minimum value, the $NIV_{(user, location)}$ is reset to 0. However, it is also possible under the present invention to specify different *NIV_rate_decrease* values when an *enter_loc* event occurs for a particular portion of the grid. If a *NIV_rate_decrease* is not defined for the location, a *default_NIV_rate_decrease* value is assigned. Similarly, when a user is absent from an area, a *default_NIV_rate_increase* is typically assigned.

NIV data:

<NIV node 0>	1 st NIV data element
<NIV node1>	2 nd NIV data element
<NIV nodeN>	Nth NIV data element

NIV node:

<Location_name>	(Optional) Optional unique location descriptor
<Novelty Index Value>	Current NIV value
<Time_last_updated>	Time the NIV node for last updated
<Location_Y>	Location coordinate Y
<Location_X>	Location coordinate X

<NIV_rate_increase>	The rate at which the NIV is decreased in value each time a <i>enter_loc</i> event occurs
<NIV_rate_decrease>	The rate at which the NIV is increased in value in the absence of an <i>enter_loc</i> event.

5

Queries

The augmented reality services can use NIV system for detecting suitable placements of augmented objects. The queries includes the following:

(1) *Find_Suitable_Places* (*User*, *Area*, NIV_{min} , NIV_{max}) - Returns a set of suitable places for object that has NIV values inside the range of $NIV_{min} \dots NIV_{max}$ for the user. The returned places are real-world coordinates of the NIV grid.

<User>	The user ID
<Area>	Real-world coordinates that defines an rectangular area
<NIVmin>	Minimum NIV value accepted
<NIVmax>	Maximum NIV value accepted

5 (2) *Get_Accumulated_NIV*(*User*) - Returns the accumulated NIV value that has been gathered since this query was last used and may further reset the accumulation value to zero.

(3) *Get_NIV*(*User*, *Location*) - Returns the current NIV of a location.

(4) *Optimize* (*User*, NIV_{max}) - Optimizes the use NIV database, by updating
10 the NIV values and deleting the ones that have value higher than NIV_{max} .

Implementation of a NIV system can be embodied in a NIV server that is run from a mobile device. When the user subscribes to an augmented reality service, the service can query for suitable places for each augmented object. Since the data storage of a mobile phone is quite limited, the *Optimize* query option can be used to reduce the storage
15 requirements. Choosing a larger or smaller location grid size for the user would help minimize database storage issues. Alternately, the NIV server can also be run remotely and the mobile device would send location updated to the sever. SIP technology can also be used for sending the NIV updates to the server in case the NIV database resides in a remote server. The NIV queries might use a Service Provider interface (SIP) in cases
20 where the NIV database resides in the mobile device. The SIP technology enables the mobile phone to receive and send wireless messages to/from the NIV system.

An alternate embodiment allows the system to also change a configuration of a wireless device as well using the NIV system. In **Figure 4** and **4A**, a user's wireless device is shown **100** as well as a user display **25**. In **Figure 4**, the user may have the wireless device **100** automatically configured to an NIV or location value, wherein an application program or display is automatically configured for that location. in the example of **Figure 4**, the user has a display configured to a work application that is loaded into the device when the device is located at the user's workplace. Various applications (corporate, third-party, or user-defined) are set in the device, where the user may view or interact with those applications. As the user moves about, the device may be configured to load alternate applications at specified locations. In the example of **Figure 4A**, the user arrives at a golf course after work, wherein a different application is automatically loaded into the wireless device **100**, and displayed on the screen **25**. The user may now view and interact with the newly-loaded application at the new location (i.e., the golf course). The user may further specify which features of the applications are activated when the application is loaded and executed.

Figure 5 illustrates a network diagram that shows an exemplary relationship between the user's Wireless Application Protocol (WAP)-enabled portable wireless device **100**, the network server **140**, and the third party service provider **180**, interconnected over the Internet **130**. The invention is applied to wireless telephones and wireless personal digital assistants (PDAs) implementing the Wireless Application Protocol (WAP) standard. Other protocols that can be used in the invention to access the Internet include I-Mode protocol and mobile IPv6 protocol. **Figure 5** shows the user's wireless device **100** communicating over a radio link with the radio tower **114**, which is connected to a wireless network **116**, which is connected to a WAP protocol gateway **120**. The gateway **120** is connected over the Internet **130** to the server **140**. The user's WAP-enabled portable wireless device **100** can be a wireless mobile phone, pager, two-way radio, smartphone, personal communicator, or the like. The user's WAP-enabled portable wireless device **100** accesses a small file called a deck which is composed of several smaller pages called cards which are small enough to fit into the display area of the device's microbrowser **102**. The small size of the microbrowser **102** and the small file sizes accommodate the low memory constraints of the portable wireless device **100** and

the low-bandwidth constraints of a wireless network 116. The cards are written in the Wireless Markup Language (WML) which is specifically devised for small screens and one-hand navigation without a keyboard. The WML language is scaleable from two-line text displays on the microbrowser 102 of a cellular telephone, up through large LCD
5 screens found on smart phones and personal communicators. The cards written in the WML language can include programs written in WMLScript, which is similar to JavaScript, but makes minimal demands on memory and CPU power of the device 100 because it does not contain many of the unnecessary functions found in other scripting languages.

10 The Nokia WAP Client Version 2.0 is a software product containing the components necessary to implement a WAP client 108 on the wireless device 100. These components include a Wireless Markup Language (WML) Browser, WMLScript engine, Push Subsystem, and Wireless Protocol Stack. The Nokia WAP Client is a source-code product that can port and integrate into wireless devices such as mobile phones and
15 wireless PDAs. Application programs 106 stored in the wireless device 100 interact with the WAP Client 108 to implement a variety of communications applications. Details of the Nokia WAP Client Version 2.0 can be found in the online paper: Nokia WAP Client Version 2.0, Product Overview, Nokia Internet Communications, 2000, www.nokia.com/corporate/wap.

20 The WAP Client 108 includes Wireless Public Key infrastructure (PKI) features, providing the infrastructure and the procedures required for authentication and digital signatures for servers and mobile clients. Wireless PKI is a certificate-based system that utilizes public/private key pairs associated with each party involved in a mobile transaction. Wireless Identity Module (WIM) is a security token feature of the WAP
25 Client 108, which includes security features, such as the public and private keys and service certificates, needed for user authentication and digital signatures. Additionally, it has the ability to perform cryptographic operations to encrypt and decrypt messages.

The wireless device 100 of Figure 5 also has a plurality of sensors for sensing the mobile user's ambient conditions. The sensors shown include POSITIONING SENSOR
30 122, TOUCH SENSOR 124, AUDIO SENSOR 125, COMPASS SENSOR 126, AMBIENT LIGHT SENSOR 128, AMBIENT TEMPERATURE SENSOR 132, and

THREE-AXIS ACCELERATION SENSOR 134. The audio sensor 125 can be a microphone, for example, which can detect speech or environmental sounds. The positioning sensor can be, for example, a GPS receiver integrated in the device. The positioning sensor can also be, for example, a radio beacon triangulation sensor that
5 determines the location of the wireless device by means of a network of radio beacons, base stations, or access points, as is described for example, in Nokia European patent EP 0 767 594 A2, entitled "Mobile Station Positioning System". These sensors provide inputs which are sampled by the wireless device 100 to infer a current context, as will be described below.

10 The WAP protocol gateway 120 links the Internet 130 and the wireless network 116. The WAP protocol gateway 120 includes the Wireless Public Key infrastructure (PKI) feature to help provide a secure Internet connection to the wireless device 100. The WAP protocol gateway 120 enables the WAP-enabled wireless device 100 to access Internet applications such as headline news, exchange rates, sports results, stock quotes,
15 online travel and banking services, or to download distinctive ringing tones.

The user's WAP-enabled portable wireless device 100 communicates with the radio tower 114 and can exchange messages for distances up to several kilometers. The types of wireless networks 116 supported by the WAP standard include Cellular Digital Packet Data (CDPD), Code-Division Multiple Access (CDMA), Global System for
20 Mobile Communications (GSM), Time Division Multiple Access (TDMA), GPRS, 3G-Broadband, and the like.

The overall process of communication between the user's WAP-enabled wireless device (the client) 100, through the WAP protocol gateway 120, to the server 140 resembles the way Web pages are served on the Internet using the HyperText Transfer
25 Protocol (HTTP) or World Wide Web protocol:

[1] The user presses a phone key on the user's device 100 related to the Uniform Resource Locator (URL) of the server 140.

[2] The user's device 100 sends the URL, via the radio tower 114 and the wireless network 116, to the gateway 120 using WAP protocols.

[3] The gateway **120** translates the WAP request into an HTTP request and sends it over the Internet **130** to the server **140**, via Transmission Control Protocol/Internet Protocol (TCP/IP) interfaces.

5 [4] The server **140** handles the request just like any other HTTP request received over the Internet. The server **140** either returns a WML deck or a HyperText Markup Language (HTML) page back to the gateway **120** using standard server programs written, for example in Common Gateway Interface (CGI) programs, Java servlets, or the like.

10 [5] The gateway **120** receives the response from the server **140** on behalf of the user's device **100**. If the response is an HTML page, it is transcoded into WML if necessary. Then the WML and WMLScript coding is encoded into a byte code that is then sent to the user's device **100**.

[6] The user's device **100** receives the response in WML byte code and displays the first card in the deck on the microbrowser **102** to the user.

15

In **Figure 5**, the protocol gateway **120** includes a WAP protocol stack organized into five different layers. An application layer is the wireless application environment, which executes portable applications and services. A session layer is the wireless session protocol, which supplies methods for the organized exchange of content between
20 client/server applications. A transaction layer is the wireless transaction protocol, which provides methods for performing reliable transactions. A security layer is the wireless transport layer security, which provides authentication, privacy, and secure connections between applications. The transport layer is the wireless datagram protocol, which shelters the upper layers from the unique requirements of the diverse wireless network
25 protocols, such as CDPD, CDMA, GSM, etc. Additional information about the WAP standard and the WAP protocol stack can be found in the book by Charles Arehart, et al. entitled, "Professional WAP", published by Wrox Press Ltd., 2000 (ISBN 1-861004-04-1).

30 In **Figure 5**, the user's portable wireless device **100** includes the microbrowser **102** and displays the Recommendation Web Services menu, to enable the user to navigate through the cards being displayed and to select options that are programmed by the

application programs **106**. The user's device **100** also includes the WAP client program **108** which has been previously discussed.

The microbrowser **102** and the user's wireless device displays a recommendation web services menu. The recommendation web services menu provides the user with
5 options to select: (A) UPDATE PRIVACY FEATURES; (B) MANAGE CONTEXT-ACTIVITY PROFILE; AND (C) REQUEST A RECOMMENDATION.

The user's wireless device **100** includes application programs **106**, the WAP client program **108**, context-activity pair and service history log **110**, current context state **111** and recommendation algorithms **112**. The network server **140** includes recommendation
10 algorithms **166**, context-activity pairs database **192**, and context inference engine **142**. The context-activity pairs database **192** may also be linked to a feedback mechanism in the server (not shown), wherein user responses to particular recommendations may be monitored.

Figure 6 discloses an alternate embodiment of the user wireless device **100** as
15 disclosed in **Figure 5**. The user's wireless device **100** includes application programs **106**, the WAP client program **108**, context-activity pair and service history log **110**, current context state **111** and recommendation algorithms **112**. In addition, a user context-activity database **148** and user log **149** are incorporated into the wireless device **100**. The user context-activity database **148** serves to complement or alternately replace the
20 context-activity database **192**, depending on the application. The user log database **149** temporarily stores or caches user context activity, and further communicates with the user context activity database **148** to provide local device processing of recommendations through recommendation algorithms **112**.

Figures 6A and **6B** show the user's wireless device with the UPDATE PRIVACY
25 FEATURES sub menu of the recommendation web services menu. **Figures 6A** and **6B** will be discussed further below. **Figures 6C** and **6D** show the user's wireless device with the MANAGE CONTEXT-ACTIVITY PROFILE sub menu of the recommendation web services menu. The MANAGE CONTEXT-ACTIVITY PROFILE sub menu offers the user the option of managing preference values for the following categories:

- 5
- (1) AUTOMOBILE
 - (a) day time radio preferences
 - (b) night time radio preferences
 - (c) map display preferences
 - (d) service station preferences
 - (2) DINING
 - (a) restaurant preferences
 - (b) food preferences
 - (3) ENTERTAINMENT
 - (a) movie preferences
 - (b) sports preferences
 - (4) TRAVEL
 - (a) weather forecasts
 - (b) airline preferences
 - (c) hotel preferences
 - (d) car rental preferences
- 10
- 15

If the user selects the option of (c) REQUEST A RECOMMENDATION, from the recommendation web services menu of **Figure 5**, then the REQUEST A RECOMMENDATION sub menu is displayed on the wireless device, as is shown in **Figures 6E and 6F**. The options presented to the user in the REQUEST A RECOMMENDATION sub menu are activity categories. The activity categories are displayed as follows:

20

- (1) AUTOMOBILE ACTIVITIES
 - (a) request day time radio recommendation
 - (b) request night time radio recommendation
 - (c) request map recommendation
 - (d) request service station recommendation
 - (2) DINING ACTIVITIES
 - (a) request restaurant recommendation
 - (b) request food recommendation
 - (3) ENTERTAINMENT ACTIVITIES
 - (a) request movie recommendation
 - (b) request sports recommendation
 - (4) TRAVEL ACTIVITIES
 - (a) request weather forecasts
 - (b) request airline recommendation
- 25
- 30
- 35

- (c) request hotel recommendation
- (d) request car rental recommendation

If the user selects the option of DINING ACTIVITIES and specifically "request restaurant recommendation" in the browser 102 of **Figure 5E**, then the wireless device 100 proceeds to interact with the network server 140, to produce the result of the browser 102 displaying the page shown in **Figure 5G**. As is seen in **Figure 5G**, the user selected activity of "DINING-restaurant" is coupled with the context that the wireless device 100 determines to exist at the present time in the vicinity of the wireless device 100. The activity coupled with a description of the current context, is transmitted from the wireless device 100 to the network server 140. At the server 140, context-activity pairs in the database 192 are approximately matched to the current context-activity pair received from the device 100, and the server accesses associated recommendations that are stored in the database 192. The associated recommendations are then transmitted back to the device 100. This operation will be discussed in greater detail in connection with **Figure 8A** below.

Turning now to **Figure 7**, a functional block diagram is shown of the wireless device 100, with its various components and programs. A memory 202 of the wireless device 100 is connected by means of a bus 204 to a keypad 104, a radio 206, a sensor interface 208, a central processor 210, and a display 212 which displays the browser 102. The memory 202 stores the context-activity pair and service history log 110, which is shown in greater detail in an example in **Figure 8C**. The memory 202 also stores the current context state 111 which includes a description of the environment of the wireless device 100 at the present time. As will be discussed further below, the characterization of the environment of the wireless device 100, includes the metadata vector 138 which includes information relating to the sensor signals input from the sensors at the current time. Also included in the memory 202 are recommendation algorithms 112 which will be discussed further below.

Figure 7A is a functional block diagram of the wireless device 100, the server 140 and the webserver 160 and their interaction when exchanging a metadata vector 138 and privacy control data 150' and when exchanging a context-activity pair 190 and associated recommendations 200. **Figure 7A** will be discussed in greater detail below in

conjunction with the network process flow diagram of **Figure 8** which shows the interaction of the wireless device **100** with the network server **140** and the web server **160** when carrying out the determination of the current context of the wireless device **100**.

Turning now to **Figure 8A**, a network process flow diagram is shown of the interaction of the wireless device **100** and the network server **140** when the user's wireless device sends a current context-activity pair to the network server **140** and the resultant service recommendations received back from the server **140**. There are two ways that the user's device **100** can initiate sending the current context-activity pair to the server **140**. The first way is shown in step **322** of **Figure 8A**, where the user's device **100** is programmed to automatically obtain current context state **111** from a context inference engine **136**, and to select an appropriate activity from the history log **110**, and to send the current context-activity pair to the server **140**. Another way that the device **100** can send a context-activity pair is shown in step **324**, where the user inputs a selection of an activity onto the request a recommendation sub menu shown in **Figure 5E** or **1F**. In response, the device **100** then obtains the current context state **111** from the context inference engine **136**. The device **100** then sends the current context-activity pair to the server **140**.

Step **326** of **Figure 8A** shows that the context-activity pair can be processed by the recommendation algorithms **112** in the wireless device **100**, before transmission to the server **140**. An important feature of the invention is that the information transmitted to the network server **140** is without any user identification, in order to preserve the privacy of the user's information. Often instead of single context-activity pair **190** a sample filtered by recommendation algorithm **112** of representative context-activity pairs and related service history items from log **110** is transmitted to recommendation algorithm **166**. That is, message **190** is often a set of context-activity pairs and related service history items.

In an alternate embodiment of the invention shown in **Figure 8E**, Step **326'** sends to recommendation algorithm **166** in server **140**, a sample of representative context-activity pairs filtered by algorithm **112** and related service history items from log **110** as a set of context-activity pairs and related service history items.

In step 328 of **Figure 8A**, the network server 140 receives the context-activity pair 190 from the device 100, and processes the context-activity pair with the recommendation algorithms 166. The recommendation algorithms 166 match the context-activity pairs stored in the database 192 which are similar to the context-activity pair which was
5 received from the device 100, and it accesses the associated recommendations for the matched context-activity pairs from the database 192. This can be seen to better advantage in **Figure 8B** which shows the context-activity pairs and associated services database 192 in the server 140.

Referring for a moment to **Figure 5G**, the user has selected at the wireless device
10 100, the activity of "dining - restaurant". The current context is a particular local time and location, a particular light level, ambient temperature, speed and acceleration. This current context information, values sent from the recommendation algorithms 111 in the device 100, and optionally the corresponding metadata vector 138, are sent as the context-activity pair information 190 to the network server 140.

Referring now to **Figure 8B** showing an example of the contents of the database
15 192, the first row in the context-activity pairs column gives a range of times, a range of locations, a range of temperatures and a range of speed and accelerations for context-activity pairs which are to be matched with the current context-activity pair being transmitted from the wireless device 100. The corresponding associated service
20 recommendations are shown in the middle column. For each respective service recommendation in the middle column, there is a corresponding number of times that that particular recommendation has been made to other users in the past, as shown in the right-hand column of **Figure 8B**. The current context is 8:00 PM at night and therefore the service recommendations seem to be different from the service recommendations that
25 would be made from the second row of the database 192 in **Figure 8B**. In the second row it can be seen that the context-activity pairs deal with a morning timeframe at the same location. There, it can be seen that in the middle column for the second row, the recommendations are not the same as they were for the nighttime recommendations for the first row. Similar to the previous description, the right-hand column of **Figure 8B**
30 gives the number of times that each respective service recommendation has been made to prior users. The recommendation algorithms 166 in the network server 140 perform the

matching operation and identify the first row in **Figure 8B** as a match for context-activity pairs. Accordingly, the recommendation algorithms **166** in the network server **140** return the recommendations **200** to the user's wireless device **100**. Those recommendations are the service recommendations shown in the upper row middle column of **Figure 8B**. The
5 number of times each recommendation has been made can also be transmitted in the recommendations **200**. This is performed in the step **336** of the process diagram of **Figure 8A**. The "number of times recommended" is only one of the measures which can be used to generate new recommendations. Other measures include parameters based on feedback.

Step **332** of **Figure 8A** receives the recommendations **200** at the wireless device
10 **100**, and the recommendation algorithms **112** apply a filtering operation to the received recommendations to identify any new or significant information. New information can be determined by reference to the context-activity pairs and service history log **110** in device **100**, which is shown in greater detail in **Figure 8C**. There it can be seen that in the past, this particular wireless device **100** has received old recommendations for two entries
15 which are also part of the set of recommendations **200** now being received from the server **140**. The recommendation algorithm **112** removes the two old recommendations shown in the top row middle column of **Figure 8C** so that only the new recommendations received in the recommendations **200** from the network server **140** are to be displayed to the user in the wireless device **100**. The recommendations algorithms **112** can also make
20 other determinations, for example it can examine the user's rating of the respective old recommendations as shown in **Figure 8C** and can take the user's rating into consideration in the display of current recommendations to the user. The recommendation algorithms **112** in the wireless device **100** can also take into consideration the number of times that each respective recommendation has been previously recommended to other users, that
25 information having been transmitted in recommendations **200** to the wireless device **100**. Then in step **334** of **Figure 8A**, the wireless device displays the filtered recommendations to the user. Alternately, the wireless device can transfer the filtered recommendations to an application program for further processing. In some embodiments the wireless device **100** provides feedback to the server **140** after step **334**. The feedback is used to enhance
30 the quality of later matching operations in step **328**.

At the network server 140, as shown in **Figure 8A**, step 336 transitions to step 338 in which the new context-activity pairs and recommendations are added to the database 192. An important feature of this invention is that there is no user identification which is included in the database 192. Then step 340 of **Figure 8A** computes usage statistics for the context-activity pairs in the database 192 and associates the usage statistics with the respective recommendations stored in the database 192. This information can have economic value to third party service providers such as the service provider 180. As is seen in **Figure 8A**, step 342 shows the third party service provider 180 purchasing selected data sets from the database 192 to be used for market research.

An alternate embodiment of the invention is shown in **Figure 8D**. In the alternate embodiment, the context-activity pair information 190 sent by the wireless device 100 in **Figure 7A** to the network server 140, includes the metadata vector 138. Where the processing power or memory capacity of the wireless device 100 may be limited, the network server 140 can make a more accurate determination of the mobile user's current context by assisting in the further processing of the metadata vector 138. The metadata vector 138, which is discussed in greater detail below, represents the current sensor signals and characterizes the current state of the wireless device 100. A context inference engine 142 in the network server 140 of **Figure 7A** is embodied as programmed instructions executed within the server 140. The resultant current context computed by the server 140 and the activity information received from the wireless device 100 in the context-activity pair 190, constitute the current context-activity pair. The context-activity pair database 192 maintained by the server 140 associates a current context-activity pair with appropriate recommendations made in the past to many users. As the system makes new recommendations to users in response to context-activity pairs submitted by their wireless devices, the server 140 gathers the new recommendations and adds them to its context-activity pair database 192. No user personal data is included in the context-activity pair database 192. In this manner, the variety, quality and pertinence of the recommendations in the database 192 grows as the recommendation system is used. As an added benefit, the server 140 compiles statistical usage information about the recommendations and stores this in the context-activity pair database 192.

The network process flow diagram of the alternate embodiment of **Figure 8D** begins with either step **321** or step **323** in the user's wireless device **100**. In step **321**, the user's device **100** is programmed to automatically obtain the current metadata vector **138** from the context inference engine **136**, and to select an appropriate activity from the history log **110**. In alternate step **323**, the user can make an activity selection from the request a recommendation sub menu shown in **Figure 5E** or **1F**. Both steps **321** and **323** flow into step **325** in the user's wireless device **100**. In step **325**, the context inference engine **136** contacts the context inference engine **142** of the network server **140** shown in **Figure 7A**, and sends the metadata vector **138** and activity as the context-activity pair **190** to server **140**. The process then flows to step **327** in the network server **140**. The context inference engine **142** at network server **140** uses user information stored in the server in the user database **146** to make a more accurate determination of the wireless device's current context. Step **327** then flows to step **328**, and the rest of the steps in the flow diagram of **Figure 8D** are substantially the same as those described above for **Figure 8A**. In this manner, the network server **140** can then assist the wireless device **100** in determining the wireless device's current context, as well as the server **140** sending the resultant service recommendations back to the wireless device **100**.

CONTEXT SENSITIVE WEB SERVICES

The context sensitive web services feature enables a mobile phone or wireless PDA to use context inference techniques to sense the user's environment and in response, to provide recommendations to the user that is appropriate to the user's perceived environment. The feature offloads some of the computationally intensive computing necessary in context inference techniques, from the mobile user's wireless device to a server and to web sites on the Internet. The context sensitive web services feature maintains a personal profile of the mobile user's personal preferences in an online server or web site. The mobile user is provided with the ability to control access by application programs in the wireless device, to the user's private data. The context sensitive web services feature provide the mobile user with the ability to control any access to the user's profile by the online server or web site.

The mobile user's wireless device is equipped with a context inference engine for providing and awareness of the mobile user's context to application programs, including third party applications. Since the processing power and storage capacity is limited in typical wireless devices, the computational load and storage requirements of the context inference engine are distributed to a context inference server capable of processing the context data. The feature enables the mobile user to control which application programs in the wireless device are granted access to the user's private context information. A privacy control block in the wireless device grants or revokes access by application programs to the private context information, based on the mobile user's preferences stored in a privacy profile. The same privacy control and privacy profile is extended to the context inference server, thereby enabling the extension of the user's privacy control to any web server connected to the context inference server. The feature thus enables building an infrastructure for context sensitive applications and services within the wireless device and the server, while providing to the mobile user control over the privacy user's context information.

RECOMMENDATION WEB SERVICES FEATURE

The Recommendation Web Services menu displayed by the microbrowser 102 in **Figure 5** is rendered by the WAP client program 108 under the control of the application programs 106, which are shown in **Figures 6** and **6A**. If the UPDATE PRIVACY FEATURES session type is selected by the user, the Recommendation Web Services menu of **Figure 5** then presents to the user the UPDATE PRIVACY FEATURES sub-menu from which the user can select the following options:

- [A] UPDATE PRIVACY FEATURES:
 - [1] UPDATE YOUR PRIVACY PROFILE
 - [2] UPDATE YOUR PERSONAL DATA
 - [3] AUTHENTICATE A PROGRAM

Option [1] of UPDATE YOUR PRIVACY PROFILE, leads to a second sub-menu shown in **Figure 5A**, which has the following options:

- [1] UPDATE YOUR PRIVACY PROFILE
 - [a] Add a local program to permissions list
 - [b] Remove a local program from list

and/or to access other portions of the user's private data. There are several levels of permission that can be granted by the user in two categories, [a] when can the accesses take place and [b] what data can be accessed.

Option [4] of REGISTER A PROGRAM, leads to a another sub-menu shown in
5 **Figure 5B**, which has the following options:

[4] REGISTER A PROGRAM

[a] When can the accesses take place

[b] What data can be accessed

For the first category of [a] when can the accesses take place, the highest level of
10 permission in this category is that access can occur anytime and without notice. The lowest level of permission in this category is that access can only occur at specified times or under specified conditions, and only after notice to the user and specific authorization by the user. For the second category of [b] what data can be accessed, the highest level of permission in this category is to access unlimited datasets in the user's private data,
15 including current context information, personal data entered by the user, the user's Internet usage history data, the user's Internet cookie data, and the user's application program usage data. The lowest level of permission in this category is that access of any data can only occur after notice to the user and specific authorization by the user. The user can configure any levels of permission in between the highest and lowest and make that the
20 basis for the registration. The user can include the terms of registration in a digital certificate signed by the user and appended to the application program. This registration certificate can be presented by the program to the privacy control 150 prior to a proposed access event, the privacy control 150 to automatically verify the registration status of the program. The registration certificate can be constructed as follows.

25 The privacy control 150 can compute a message authentication code (MAC) and its own digital signature and append it as a certificate to an acceptable application program A, B, X, or Y. The privacy control 150 can include the terms of registration in the digital certificate. Then when the program requests access to the user's private data, the privacy control 150 can automatically check the MAC and its own digital signature to
30 verify that the program has not been changed and the privacy control 150 can also

automatically verify the registration status of the program. This is achieved by the privacy control **150** computing a hash value for the entire application program A, B, X, or Y (or some portion of it) and the terms of registration, and then forming a message authentication code (MAC) from the hash value. The privacy control **150** then uses its
5 PKI private key to digitally sign the message authentication code (MAC). The terms of the registration, the MAC and the privacy control's digital signature are appended to the application program A, B, X, or Y as a registration certificate.

Then, whenever the application program A, B, X, or Y requests access to the user's context data or private data, the privacy control **150** will require the application
10 program to present the registration certificate so that the privacy control **150** can check that the presented MAC compares with a computed MAC and that the presented digital signature is genuine. The privacy control **150** can then automatically grant access permission to the application program, in accordance with the terms of the registration.

Methods to generate and evaluate message authentication codes to insure the
15 integrity of data are described in the book by Stephen Thomas entitled "SSL and TLS", published by John Wiley and Sons, 2000. Two example algorithms for message authentication are RSA's Message Digest (MD5) and the Secure Hash Algorithm (SHA), both of which are described in the book by Stephen Thomas. Another reference that goes into greater detail in its discussion of data integrity methods is the book by Bruce
20 Schneier entitled "Applied Cryptography - 2nd Edition" published by John Wiley and Sons, 1996. Methods to generate and evaluate digital signatures to insure the source of the digital program are described in the book by Richard E. Smith entitled "Internet Cryptography", published by Addison Wesley, 1997.

What has been described here for the privacy control **150** in the wireless device
25 **100**, is equally applicable to the privacy control **164** in the network server **140** of Figure 7A. The privacy control **164** in the network server **140** can compute the message authentication code (MAC) and its own digital signature and append it, with the terms of the registration, as a registration certificate to an acceptable application program in the web server **160**. Privacy control **164** has a cached copy **144** of the Privacy Profile **152** of
30 the wireless device **100**. This enables automatically processing the privacy check in the network Server **140** for access requests from web server **160**. When the application

program in the web server 160 requests access to the user's private data in the network server 140 or in the wireless device 100, the privacy control 164 in the network server 140 will require the application program in the web server 160 to present the registration certificate so that it can check the MAC and its own digital signature to verify that the application program has not been changed. The privacy control 164 can then automatically grant access permission to the application program in the web server 160, in accordance with the terms of the registration.

Figure 7 is a functional block diagram of the wireless device 100, showing its various components and programs. The wireless device 100 has context sensitive applications A, B, X, and Y, either downloaded, or in firmware. The wireless device 100 does not need to utilize external functionality in the network for the initial sampling and digitization of the sensor inputs. The sampled and digitized values of the sensor inputs are POSITIONING METADATA 122', TOUCH METADATA 124' AUDIO METADATA 125', COMPASS METADATA 126', AMBIENT LIGHT METADATA 128', AMBIENT TEMPERATURE METADATA 132', and THREE-AXIS ACCELERATION METADATA 134'. The sampled and digitized values of the sensor inputs are loaded into a metadata vector 138.

Figure 7 shows the memory 202 of the wireless device 100, connected by the bus 204 to the keypad 104, the radio 206, the sensor interface 208, the central processor 210, and the display 212. The memory 202 stores programs which are sequences of executable instructions which, when executed by the processor 210, carry out the methods of the feature. The memory 202 stores the WAP client program 108, the context inference engine 136, the privacy control 150, the privacy profile 152, the context aware API 154, the motion/gesture API 156, the location API 158, and other APIs 162. The context inference engine 136 processes the metadata vector 138 to produce the current context. Application programs 106 stored in the memory 202 include the application programs A and B which are part of the software system SS1, and the application programs X and Y which are contained in the execution environment "Exec. Env."

If sufficient computational power and storage capacity are available in the wireless device 100, further processing of the metadata vector 138 can take place in the context inference engine 136, toward the objective of producing the result of an inferred current

context. However, if at some point in the computation, the context inference engine 136 needs the processing power or storage capacity available at the network server 140, the metadata vector 138 is sent from the wireless device 100 to the context inference engine 142 in the network server 140 of **Figure 7A**. The context inference engine 142 in the network server 140 an inferred current context can perform the required processing on the metadata vector 138 and then return it to the context inference engine 136 in the wireless device 100 for completion of the an inferred current context result. Alternately, the context inference engine 142 in the network server 140 can complete the required processing and then return the resultant inferred current context to the wireless device 100.

Figure 7 shows the architecture of a wireless device with support for context awareness. The context awareness is built on top of sensory information received from various types of sensors physically located in the handset shown in **Figure 5**. The sensors shown include POSITIONING SENSOR 122, TOUCH SENSOR 124, AUDIO SENSOR 125, COMPASS SENSOR 126, AMBIENT LIGHT SENSOR 128, AMBIENT TEMPERATURE SENSOR 132, and THREE-AXIS ACCELERATION SENSOR 134. The sensors can also be located in accessory-like phone covers or in a wireless accessory such as a Bluetooth enabled device. The sensors may also be located in the environment such as in the user's rooms or vehicles. Also the time duration of use of a phone and other available information can be used along with sensor data in context awareness services.

Figure 7 shows sensor data received from the sensors 122, 124, 125, 126, 128, 132, and 134 is processed by Context Inference Engine 136 which then feeds the data through various APIs 154, 156, 158, and 162 to application programs A, B, X, and Y. The application programs may register themselves at the Application Programming Interface 154 to receive current context or changes in the context. This enables context sensitivity in the application programs.

Figure 7 also shows "native" application programs A and B which are executed in a first software system SS1 of the wireless device 100. The term "Software System" is used here for any environment with execution capability. This first software system may be proprietary or based on a commercially available real-time operating system, such as NOS, ISA, EPOC, JAVA, or WAP. Third party application programs X and are executed

within an execution environment. This execution environment may limit the system capabilities available for the application programs, such as access to APIs (fixed, not dynamic behavior). **Figure 7** further shows the mobile user's privacy control feature. The privacy control feature enables the user to designate which application programs are

5 granted access to the context awareness APIs **154** to utilize the current context information produced by the context inference engine **136**. All requests or registrations by application programs A, B, X, and Y to have access to the Context Inference Engine **136**, must first go through the Privacy Control block **150**. Privacy Control block **150** uses the user's security data check stored in the Privacy Profile **152** to grant access rights to the

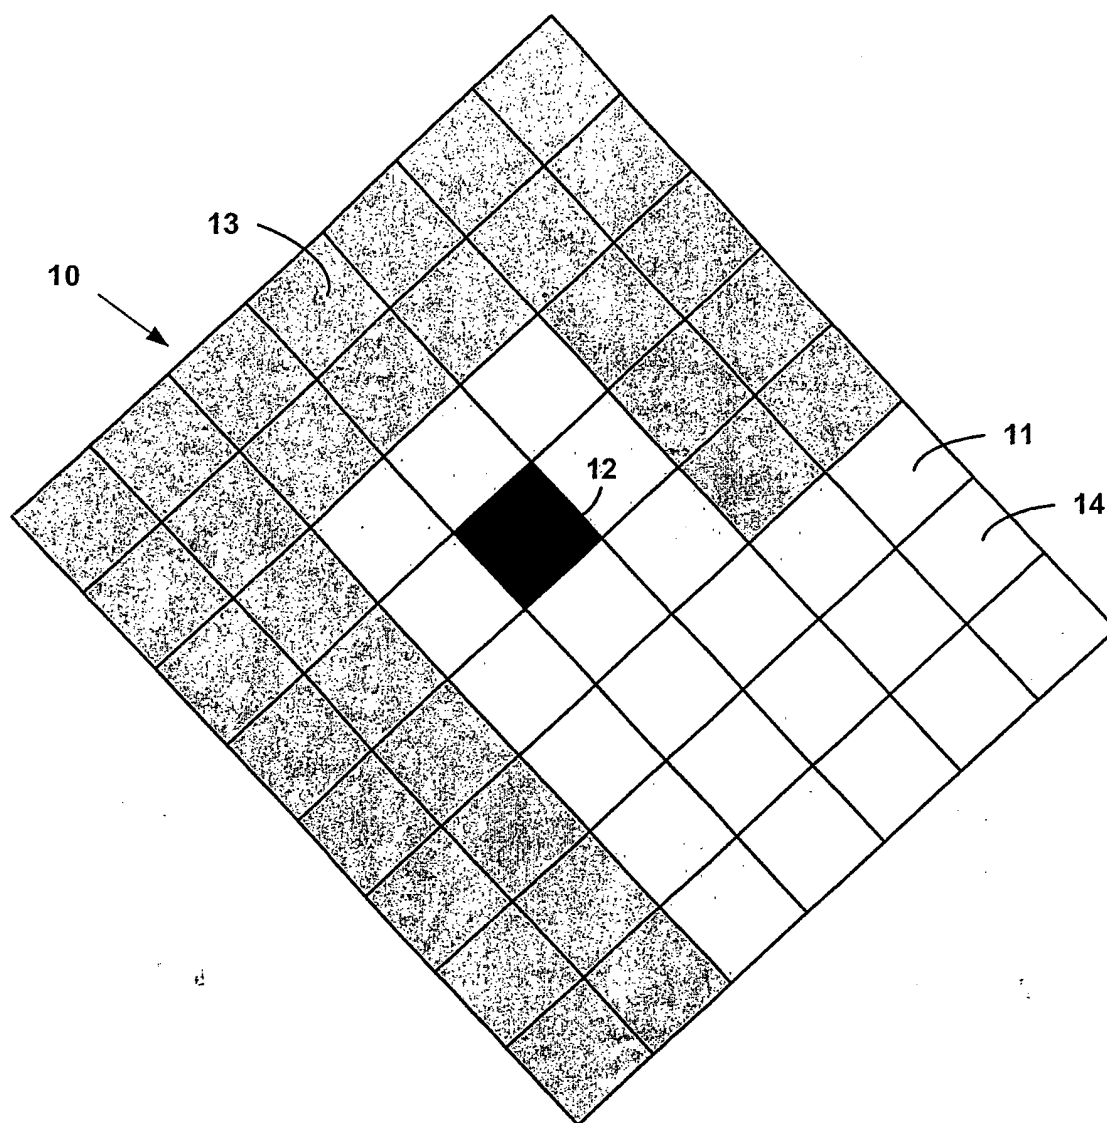
10 requesting application programs. The user controls the granting of access rights by means of the user's security data input by the user through the user interface. The user's security data includes permissions list **155**, Public Key Infrastructure (PKI) certificates **157**, PKI trusted authority trust list **159**, and flags set by the user for those application programs that have been authenticated by the PKI procedures, data set **161**. The user can update the

15 user's security data with the UPDATE PRIVACY FEATURES menu displayed by the wireless device **100** shown in **Figures 1A** and **1B**. Access might be granted to an application program based on its digital signature, which is a part of the system applications, or other means known in the art. It is also possible to provide a separate system-wide Privacy User Interface to the privacy control **150**, which can be employed by

20 the mobile user to set the privacy policies and to alert the mobile user that an application program is attempting to register to receive the user's private context awareness information. The privacy control **150** and Privacy Profile **152** enable the mobile user to grant, deny, or revoke access, to grant access for a limited time, or to require an application program to always request registration before the user grants access.

25 In **Figure 7**, the Context Inference Engine **136** in the wireless device **100** makes inferences from all the sensor inputs based on where the wireless device is located by the mobile user. For instance the inferred current context of the device **100** may be "IN THE USER'S POCKET", when a certain set of sensors input a specific combination of signals having a specific value range. As an example, the resulting inference of the current

30 context by the Context Interference Engine **136** could be expressed in XML language format as follows:

**Figure 1**

<Context Inference Engine in Device>

<device placement> pocket </ device placement>

<User Interface state> sleep mode </User Interface state>

< device location> in elevator 5 building 1 floor 2</ device location>

5 <API active actions> meeting starting on floor 3 room 322 </API active actions>

</Context Inference Engine in Device >

The Context Inference Engine **136** in the wireless device **100** can perform the context inference process with any of several methods. Different input information from the sensors can be weighted according to their relative value of importance appropriate for each environment condition or situation to be analyzed. Each sensor has it's own weight value. Alternatively, the weight values for each sensor for each environment condition can be learned from training sessions using, for example artificial neural networks (ANNs), self-organizing maps (SOMs), decision trees, fuzzy rule-based systems, or model-based systems such as Hidden Markov Modeling (HMM). Combinations of two or more of the alternate methods can be used, depending on the application.

The Context Inference Engine **136** can continuously adapt its weights through adaptive and continuous learning methods, where the user teaches the wireless device **100** new environment conditions and names them. Hidden Markov Modeling (HMM) can be used, for example, to implement an adaptive and continuous learning method for the Context Inference Engine **136**. Alternately, the wireless device **100** can be programmed to spontaneously recognize a changed scene by comparing it with known scenes. The user can teach the wireless device new environmental conditions and name them, using the adaptive and automatic learning capability of neural networks. Adaptive and continuous learning methods are computationally intensive and are appropriate candidates to place on the network server **140**, which assists the wireless device **100**, as discussed below.

The field of context inference has applied the principles of automated pattern recognition to processing diverse types sensor inputs. Speech recognition has been

applied to processing speech signals and handwriting recognition has been applied to processing hand force and accelerometer signals. In the field of robotics, image recognition has been applied to processing digitized still and motion images, mechanical location recognition has been applied to processing laser and sonar range finder signals, and mechanical motion recognition has been applied to processing inertial, acceleration, and heading signals. In the field of prosthetic devices, touch recognition has been applied to processing tactile sensor signals. In the field of medicine, automated diagnostic programs recognize various pathologies by processing bioelectric field signals, as well as the more traditional pulse, respiration rate, and body temperature signals. These diverse sensor signal recognition processes have the common feature that an initial training stage is conducted where sampled signals are equated with a statistical model for those signals.

The principles of automated pattern recognition for these diverse sensor inputs are exemplified by the techniques for recognizing speech patterns. A common technique used in speech recognition is Hidden Markov Modeling (HMM). The term "Hidden" refers to the probabilistic and not directly observable events which underlie a speech signal. HMM speech recognition systems typically use realizations of phonemes which are statistical models of phonetic segments having parameters that are estimated from a set of training examples. Models of words are made by chaining or linking appropriate statistical models of phonetic segments. The statistical models serve as standards which are to be matched with the unknown voice signals to be recognized.

Recognition of unknown voice signals requires sampling and digitizing the speaker's spoken phonemes. These digitized phonemes are then processed into metadata. The metadata is then compared with the standard statistical models of phonemes. The most likely matches are then the inferred speech recognition result.

Recognition consists of finding the most likely path through the set of word models for the input speech signal. HMM speech recognition decoding systems first need to be trained through an iterative process. The system must be exposed to training examples or words of a particular speaker's voice. A training word is analyzed to generate a framed sequence of acoustic parameters or statistical models. A valid or "good" recognition occurs when the most likely path through the set of word models for the training word results in recognizing the correct training word.

Some useful references discussing the principles of Hidden Markov Models are:

Rabiner, L. R., "A tutorial on hidden Markov models and selected applications in speech recognition", Proceedings of the IEEE, volume 77, number 2, 1989, pages 257-286.

Rabiner, L. R. and Juang, B. H., "An introduction to hidden Markov models", IEEE ASSP

- 5 Magazine, January 1986, pages 4-15. Fraser, Andrew M. and Dimitriadis, Alexis, "Forecasting Probability Densities by Using Hidden Markov Models with Mixed States", Time Series Prediction: Forecasting the Future and Understanding the Past, Addison-Wesley, editor Weigend, Andreas S. and Gershenfeld, Neil A., 1994. Charniak, Eugene, Statistical Language Learning, MIT Press, Cambridge, Massachusetts, 1993.

- 10 To illustrate how Hidden Markov Modeling (HMM) can be extended beyond speech recognition, an example is given here for touch recognition. In the training stage for touch recognition, tactile sensor signals are input from touching a tactile transducer to a rough texture, such as for example sandpaper. The tactile sensor signals are transformed into a statistical model of the input signal. The statistical model is stored as a
- 15 standard in a computer memory under the handle "rough_texture". To expand the range of sensor signals that are included in the model for "rough_texture", several training sessions can be conducted, each with a different direction or pressure for touching the sandpaper, resulting in several different samples of the statistical model. The set of samples of the statistical model are stored as a standard under the handle "rough_texture".
- 20 Other training sessions are conducted with a smooth texture, such as glass. The tactile sensor signals input from touching the tactile transducer to the smooth texture are transformed into a statistical model of the input signal and stored as a standard under the handle "smooth_texture". Later, in the recognition mode, an unknown object is touched by the tactile transducer resulting in a sample tactile sensor signal. Recognition of
- 25 unknown touch signals requires sampling and digitizing the touch transducer's signals. These digitized sensor signals are then processed into metadata. The metadata is then compared with the standard statistical models of "rough_texture" and "smooth_texture". The most likely match is then the inferred touch recognition result.

- 30 Combinations of two or more types of sensors can have their signals combined into an input metadata vector that characterizes a composite sampling event. The composite sampling event can be recognized using the principles of Hidden Markov

Modeling (HMM). An example composite sampling event can be the state of the health and fatigue of the user of a wireless device 100. For example, a wireless device 100 can be equipped with a tactile transducer which outputs tactile sensor signals in response to the hand force and pulse rate of the user who is gripping the wireless device 100. The
5 wireless device 100 can be equipped with a temperature sensor which outputs body temperature signals in response to the user gripping the wireless device 100. Hidden Markov Modeling (HMM) can be used to recognize a force/temperature input metadata vector that characterizes the combination of the hand force and the temperature sensor signals resulting from a sampling event. A composite sampling event in this example can
10 have an extended duration so that the force sensor can transduce the pulse rate of the user over a period of time.

In the training stage, the tactile sensor signals and the force sensor signals are output while the user is in a condition of good health and resting normally. The tactile sensor signals and the force sensor signals are combined into a force/temperature input
15 metadata vector which is transformed into a statistical model of the input signals. The statistical model is stored as a standard in the computer memory of the wireless device 100 under the handle "good_health_resting_normally". Other training sessions are conducted with the user in different states of health and fatigue. For example, the user may be training the wireless device 100 while working late at night at the office. The
20 tactile sensor signals and the force sensor signals resulting from holding the wireless device 100, are combined into a force/temperature input metadata vector for the user in the condition of being in good health but fatigued. The force/temperature input metadata vector is transformed into a statistical model of the input signals and stored as a standard under the handle "good_health_fatigued".

25 Later, in the recognition mode, as the user holds the wireless device 100, the tactile sensor signals and the force sensor signals are sampled. The Health/Fatigue_State recognition consists of sampling and digitizing the touch transducer's signals. These digitized sensor signals are then processed into a metadata vector. The metadata vector is then compared with the standard statistical models of handle "good_health_
30 resting_normally" and "good_health_fatigued". The most likely match is then the inferred touch recognition result.

In accordance with the feature, this recognition result can be used by a health maintenance application program in the wireless device 100, to provide useful and appropriate information to the user. For example, a health maintenance program can process the recognition result, and in response, signal an alarm to the user and provide suggestions for medications to palliate the sensed fatigue. One problem with automatic recognition programs is that they are either relatively large or they call databases that are relatively large in comparison to the memory capacity of the wireless device 100.

Another aspect of the feature is the recognition result can be used by a supplementary application program in a remote server, to provide additional and more detailed useful and appropriate information to the user. For example, the server can access a large database of suggestions for medications to palliate the sensed fatigue of the user. The results of the search of the database can be returned to the wireless device 100. The server can also maintain a personal profile of the user's characteristics and preferences and it can use that profile in automatically formulate its query to the database. For example, the user's drug allergies can be stored in the server's database, to insure that recommendations are not made that will result in an allergic reaction by the user to the suggested medication.

Figure 7A is a functional block diagram of the wireless device 100, the server 140, and the web server 160, and their interaction when exchanging the metadata vector 138 and the privacy control data 150'. These exchanges are bulk encrypted with a symmetric session key, such as a Data Encryption Standard (DES) key, to protect the privacy of the data. To insure the integrity of the metadata vector 138 and the privacy control data 150', a message authentication code (MAC) can be computed and appended to the data, as described in the above referenced book by Stephen Thomas entitled "SSL and TLS", published by John Wiley and Sons, 2000. To insure that the source of the metadata vector 138 and the privacy control data 150' cannot be repudiated, a digital signature can be appended to the data, as described in the above referenced book by Richard E. Smith entitled "Internet Cryptography", published by Addison Wesley, 1997.

Figure 7A shows the scope of the distributed context awareness implementation. The wireless device 100 has context sensitive applications A, B, X, and Y either downloaded or in firmware. The wireless device 100 may locally preprocess part of the

context information in the metadata vector **138** before sending it to the context inference engine **142** in the network server **140** which is capable of processing the data and responding back with the resulting current context. The wireless device **100** may run application programs that require accessing the web service server **160** to provide context sensitive services to the mobile user.

Figure 7A shows how processing of sensor data from the sensors in the wireless device **100**, can be distributed between the wireless device and the network server **140**.

The operation in **Figure 7A** is as follows:

1. The sensors continuously provide the sensor data to the Context Inference Engine **136** in the wireless device **100**.
2. An application program that utilizes the context awareness APIs **154** may request the latest context information, or the application program may be registered to receive any changes to specific context information.
3. The Context Inference Engine **136** securely contacts the Context Inference Engine **142** of the network server **140** and sends the metadata vector **138** to the server **140**. Depending on the sensors and the implementation details, Context Inference Engine **136** may preprocess part of the sensor data in the metadata vector **138** prior to sending it. Depending on the sensors and the interval for processing, there may be virtual connection open between Context Inference Engine **136** and Context Inference Engine **142** for frequent data exchanges. Context Inference Engine **142** at the network server **140**, has the processing power and memory capacity to handle computationally intensive and/or memory intensive processing of the preprocessed sensor data in the metadata vector **138** to produce the current context result information.
4. Context Inference Engine **142** at the network server **140** may utilize local user information (history information, customer details) stored in the user database **146** for making a more accurate determination of the mobile user's current context.
5. Context Inference Engine **142** at the network server **140** then securely returns the current context awareness information to Context Inference Engine **136** in the wireless device **100**.

6. Context Inference Engine **136** in the wireless device **100** then provides the current context awareness information through Context Awareness APIs **154** to the application programs registered for to receive that information.

- 5 **Figure 7A** shows how Web Services in Web Service Server **160** are enabled to receive current context results of the wireless device **100**. Web Services Server **160** has a software system for server application program A and an execution environment for server application programs X and Y that are similar to the software system SS1 and execution environment (Exec. Env.) in the wireless device **100** shown in **Figure 7**.
- 10 Server Application programs A, X, and Y in Web Service Server **160** may require access through the Context Awareness APIs **178** to provide Web Services with the current context of the wireless device **100**.

- In **Figure 7A**, Web Service Server **160** uses the Context Inference Client **176** to contact the Context Inference Server **174** in the network server **140**. Context Inference
- 15 Client **176** may utilize customer database information in database **184** to enhance the context sensitivity capabilities of the web server **160**. The contact to the network server **140** is done through a context awareness interface **186** to the Context Inference Server **174** in the network server **140**.

- Context Inference Server **174** registers the Web Services of the web server **160**
- 20 through the privacy control **164** of the network server **140** to the Context Inference Engine **142**. Privacy control **164** has a cached copy **144** of the Privacy Profile **152** of the wireless device **100**. This enables processing of the privacy check in the network Server **140** for access requests from web server **160**. The communication between web server **160** and network server **140** is secured using the Internet secure protocols such as HTTPS or SSL.
- 25 The Context Inference Server **174** can publish its own service as a Web Service to other Web Services on the Internet, in which case the implementation of the interface **186** between web server **160** and network server **140** can be Extensible Markup Language (XML) messages carried in the Simple Object Access Protocol (SOAP) messaging protocol.

- 30 The Context inference Engine **142** in the network server **140** will receive processed sensor metadata vector **138** information and possibly some application API

information originated from the Context Inference Engine 136 of the wireless device 100. The Context inference Engine 142 of the network server has user database 146 information of the behavior of the user and of the past usage of the wireless device. The Context inference Engine 142 of the network server may also have third party services
5 available (such as instances offering content and/or services) to be offered to potential users. What is offered to the user can also depend on the user profile 144. The nature of the Context inference Engine 136 information of the wireless device 100 that is conveyed to the Context inference Engine 142 of the network can be controlled with the privacy control 150 that is managed by the user of the wireless device 100. The user may thus
10 fully or partly disable the Context inference Engine 142 of the network to control the amount of his/her information that can be used by third party services. The privacy control 150 enables the user to control access by anyone to his/her private information.

The Context inference Engine 136 of the wireless device receives an input from the API interface 154 from the applications A, B, X, or Y located in the wireless device
15 100. An example would be from a calendar application program indicating that a meeting is starting in 25 minutes time. As another example the calendar application program indicates that Lisa is having a birthday tomorrow into which you are participating. The Context inference Engine 136 of the wireless device can convey processed result information to the Context inference Engine 142 of the network server. Now in addition
20 to the sensor information, information from the application programs A, B, X, or Y can also be used in the decision making of the Context inference Engine 136 of the wireless device. A combination of the sensor information and information coming from the application programs A, B, X, or Y can be processed by the Context inference Engine 136. The user's behavior or usage patterns can be detected from the sensor and recorded in
25 a the user database, concerning the usage of the application programs. As previously discussed, the processing of this combined information from the sensors and from the application programs can be shared between the Context inference Engine 136 and the Context inference Engine 142.

The information transfer from the Context inference Engine 136 of the wireless
30 device to the Context inference Engine 142 of the network server can be done in alternative ways. The system can be managed so that the current consumption and

transfer capacity between the wireless device 100 and the network server 140 is taken into account. The context information does not always have to be collected so frequently that it would have to be periodically transferred to the network side 140 every few seconds.

Depending on the application, the timing window applied to information transfer from the

5 Context inference Engine 136 of the wireless device 100 to the Context inference Engine 142 of the server 140 can vary from seconds to minutes. If there were no event change or condition change in the environment of the wireless device 100, there would be no need to transfer information to the Context inference Engine 142 of the server 140.

Additionally information can be temporarily stored in a buffer in the wireless device 100,

10 which can then transferred less frequently to the network Context inference Engine 142.

Packet based GPRS and UMTS can support the less frequent information transfer rates.

Also, it is advantageous to send the network Context inference Engine 142 information from the wireless device 100 as an attachment, immediately subsequent to other signaling made to in the network direction from the wireless device 100, thus saving the radio

15 transmitter of the wireless device 100 from having to be switched on again for transferring the Context inference Engine 136 information separately to the network server 140.

Returning to **Figure 5**, the relationship is shown between the network server 140, the Universal Description, Discovery and Integration (UDDI) registry 170, and a plurality of web site servers 160. UDDI is a de facto standard for an Internet-based registry. The

20 UDDI registry 170 enables the network server 140 to discover new web sites for services and businesses on the Internet. Once such services and businesses are identified by the UDDI registry 170 to the network server 140, then the server 140 must apply the mobile user's cached privacy profile 144 in **Figure 7A**, in order to prevent unauthorized access of the user's private data by application programs on the newly discovered web sites.

25 **Figure 8** is a network process flow diagram of the interaction of the wireless device 100. In the first column, network server 140 in the middle column, and web server 160 in the right column, when they carry out the determination of the current context of the wireless device 100. The process begins with the wireless device 100 in step 302:

Step 302: PRIVACY CONTROL 150 IN WIRELESS DEVICE 100 SENDS
30 UPDATED PRIVACY PROFILE TO NETWORK SERVER 140.

Then the network server **140** continues with step **304**:

Step 304: NETWORK SERVER 140 UPDATES CACHED PRIVACY PROFILE 144.

The wireless device **100** continues with the following steps **306**, **308**, and **310**:

5 Step 306: SENSORS CONTINUOUSLY PROVIDE SENSOR DATA TO
CONTEXT INFERENCE ENGINE 136 IN WIRELESS DEVICE 100.

Step 308: APPLICATION PROGRAM THAT USES CONTEXT AWARENESS
API 154 REQUESTS LATEST CONTEXT INFORMATION.

10 Step 310: CONTEXT INFERENCE ENGINE 136 CONTACTS CONTEXT
INFERENCE ENGINE 142 OF THE NETWORK SERVER 140 AND SENDS
THE METADATA VECTOR 138 TO SERVER 140.

Then the network server **140** continues with steps **312** and **314**:

15 Step 312: CONTEXT INFERENCE ENGINE 142 AT NETWORK SERVER 140
USES LOCAL USER INFORMATION STORED IN USER DATABASE 146 TO
MAKE A MORE ACCURATE DETERMINATION OF THE MOBILE USER'S
CURRENT CONTEXT.

Step 314: NETWORK SERVER 140 REQUESTS DATA FROM WEB SERVER
160.

20 THE NETWORK SERVER'S ACCESS IS AUTHORIZED BY CACHED
PRIVACY PROFILE 144 IN NETWORK SERVER.

Then the web server **160** continues with step **316**:

Step 316: WEB SERVER PROVIDES USER INFORMATION STORED IN
DATABASE 184 TO NETWORK SERVER 140.

Then the network server **140** continues with step **318**:

25 Step 318: CONTEXT INFERENCE ENGINE 142 AT THE NETWORK
SERVER 140 THEN SECURELY RETURNS THE CURRENT CONTEXT
AWARENESS INFORMATION TO CONTEXT INFERENCE ENGINE 136 IN
THE WIRELESS DEVICE 100.

Then the wireless device **100** finishes with step **320**:

Step 318: CONTEXT INFERENCE ENGINE 136 IN THE WIRELESS DEVICE
100 THEN PROVIDES THE CURRENT CONTEXT AWARENESS
INFORMATION THROUGH CONTEXT AWARENESS APIs 154 TO THE
5 APPLICATION PROGRAMS REGISTERED TO RECEIVE THAT
INFORMATION.

Figure 9 is a functional block diagram of the network server **140**, showing a
memory **402** storing the application services software programs needed to perform the
operations of an embodiment of the feature. The memory is connected by a bus **404** to a
10 cache **144**, user database **146**, TCP/IP network adapter **406**, and a central processor **410**.
The memory **402** stores programs which are sequences of executable instructions which,
when executed by a processor **410**, carry out the methods of the feature.

Figure 9 discloses the functional components of an exemplary network server **140**
arranged as an object model. The object model groups the object oriented software
15 programs into components that perform the major functions and applications in network
server **140**. The object model for memory **402** of network server **140** employs a three-tier
architecture that includes presentation tier **415**, infrastructure objects partition **422**, and
business logic tier **414**. The object model further divides business logic tier **414** into two
partitions, application objects partition **422** and data objects partition **426**.

20. Presentation tier **415** retains programs that manage the device interfaces to
network server **140**. In **Figure 9**, presentation tier **415** includes network interface **420**. A
suitable implementation of presentation tier **415** may use Java servlets to interact with
WAP protocol gateway **120** via hypertext transfer protocol ("HTTP"). The Java servlets
ran within a request/response server that manages the exchange of messages between
25 WAP protocol gateway **120** and network server **140**. A Java servlet is a Java program
that runs within a Web server environment. A Java servlet takes a request as input, parses
the data, performs logic operations, and issues a response back to WAP protocol gateway
120. The Java runtime platform pools the Java servlets to simultaneously service many
requests. Network interface **420** accepts request messages from WAP protocol gateway
30 **120** and passes the information in the request to visit object **428** for further processing.

Visit object 428 passes the result of that processing to network interface 420 for transmission back to the WAP protocol gateway 120. Network interface 420 may also use network adapter 406 to exchange data with another user device.

5 Infrastructure objects partition 422 retains the programs that perform administrative and system functions on behalf of business logic tier 414. Infrastructure objects partition 422 includes operating system 425, and an object oriented software program component for database server interface 430, and system administrator interface 432.

10 Business logic tier 414 in Figure 9 includes multiple instances of visit object 428, 428', 428''. A separate instance of visit object 428 exists for each network interface 420 session. Each visit object 428 is a stateful session object that includes a persistent storage area from initiation through termination of the session, not just during a single interaction or method call. The persistent storage area retains information associated with the session.

15 When WAP protocol gateway 120 sends a metadata vector 138 message to network server 140, the message is sent to network interface 420 to invoke a method that creates visit object 428 and stores connection information as a state in visit object 428. Visit object 428 may, in turn, invoke a method in context inference engine 142 application 440 to perform a context inference on the metadata vector and return a current context result.

20 When WAP protocol gateway 120 sends a privacy control data 150' message to network server 140, the message is sent to network interface 420 to invoke a method that creates visit object 428 and stores connection information as a state in visit object 428. Visit object 428 may, in turn, invoke a method in privacy control 164 application 442 to update the cached privacy profile 144.

When WAP protocol gateway 120 sends a context-activity pair message 190 to network server 140, the message is sent to network interface 420 to invoke a method that creates visit object 428 and stores connection information as a state in visit object 428. Visit object 428 may, in turn, invoke a method in context-activity pair recommendations

application 446. Application 446 may, in turn make a method call to context-activity recommendations usage statistics application 448.

Figure 10 discloses a further embodiment of the invention, wherein a server 900 distributes services to communications network users 905, 906, and 907. The server 900
5 collects various user information regarding user's interests/profiles and device activities. This user information may be provided from the user or from each user's history log 149 in Figure 6, and is communicated to the network 900. The server 900 can provide its own content or may interface with outside sources (for example "Entertainment" 901, "News" 902, "Finance" 903 and/or "Weather" 904) to provide the content for the users.
10 The users can influence the received content through the modification of their interests/profiles and in their respective history logs 149. Alternately, users can upload their device activity to through a user net log 909, user location log 910 or user call log 911, where the users may modify or customize the user information and then forward their device activities to the server 900 . Various combinations may be used as well, such
15 as collecting user calls (via user call log 911) made at a particular time (via calendar 908) from particular NIV locations (via user location log 910). Additional calendar services 908 may also be incorporated into the system, such as the type described in U.S. Patent Application No. 09/397,003, filed September 14, 2000, and U.S. Patent No. 5,790,974 which are incorporated by reference herein.

20 The server 900 of Figure 10 can thus dynamically change the content transmitted to the users on the basis of each user's device location and activity. Various clubs or associations can be formed through the system based on similar interests/profiles or activities of the users. As users are formed into "communities", tailored content can then be sent to the user's devices. Information from the server 900 may also be incorporated in
25 a Web-Based portal, where users can access their device profiles and make further modifications as each user sees fit.

A description of server programming applications developed with Enterprise Java Beans is provided in the book by Ed Roman entitled "Mastering Enterprise Java Beans", published by John Wiley and Sons, 1999. A description of the use of an object model in
30 the design of server applications is provided in the book by Matthew Reynolds entitled "Beginning E-Commerce", Wrox Press Inc, 2000, (ISBN: 1861003986). Java servlets and

the development of web site servers is described in the book by Duane K. Fields, et al. entitled "Web Development with Java Server Pages", published by Manning Publications Co., 2000.

5 The resulting invention provides a distributed recommendation system having greater privacy for the user's private data. The invention distributes the tasks of a recommendation system between wireless devices and network servers, so as to protect the privacy of end users. The invention provides greater privacy for context-sensitive, adaptive, user interfaces for Internet service usage by wireless devices.

10 In addition to the embodiments described above, the NIV/recommendation/context features may be combined in various ways to produce a desired result. While the disclosure above was based in a WAP environment, the principles of the present invention are equally applicable to other technologies such as LANs or Bluetooth™ devices. Furthermore, the application of the recommendation services are great and can include features as e-commerce programs, headline news, money exchange rate programs, sports
15 results, stock quotes, weather forecasts, multilingual phrase dictionary programs, personal online calendar programs, travel programs, banking services, bill paying services/virtual wallet etc. Also, the type of data that is sent to the user's device is not limited to text files only. Ring tones, text, photographic/image content, video/multimedia content and other types or combinations of types may be transmitted under the present invention.

20 Although illustrative embodiments have been described herein in detail, it should be noted and understood that the descriptions and drawings have been provided for purposes of illustration only and that other variations both in form and detail can be made thereupon without departing from the spirit and scope of the invention. The terms and expressions have been used as terms of description and not terms of limitation. There is
25 no limitation to use the terms or expressions to exclude any equivalents of features shown and described or portions thereof.

CLAIMS

What is claimed is:

1. A method for computing a result for a location, the result depending on how novel it is for a wireless device to occupy the location, comprising:
 - 5 determining the location of a wireless device;
 - computing a novelty index value for the location, the novelty index value characterizing how novel it is for the wireless device to occupy the determined location;
 - storing the novelty index value in a database;
 - 10 running a program to determine a result that depends on the novelty index value;
 - accessing the database for information associated with the novelty index value;
 - computing the result using said information.
- 15 2. The method of claim 1, wherein the step of computing a novelty index value further comprises computing a magnitude for the novelty index value proportional to how novel it is for the wireless device to occupy the location.
3. The method of claim 1, wherein the step of computing a novelty index value
20 further comprises computing a magnitude for the novelty index value which increases as the duration of time since the wireless device has occupied the location.
4. The method of claim 1, wherein the step of computing a novelty index value
25 further comprises computing a magnitude for the novelty index value which decreases when the wireless device occupies the location.
5. The method of claim 1, wherein the step of computing a novelty index value further comprises computing in the wireless device.
6. The method of claim 1, wherein the step of computing a novelty index value further comprises computing in a separate server coupled to the wireless device.

7. The method of claim 1, wherein the step of storing further comprises storing in the wireless device.
8. The method of claim 1, wherein the step of storing further comprises storing in a separate server coupled to the wireless device.
- 5 9. The method of claim 1, wherein the step of running a program further comprises running the program in the wireless device.
10. The method of claim 1, wherein the step of running a program further comprises running the program in a separate server coupled to the wireless device.
11. The method of claim 1, wherein the step of running a program further comprises
10 determining a result for a game program.
12. The method of claim 1, wherein the step of running a program further comprises determining a result for a shopping discount program.
13. The method of claim 1, wherein the step of running a program further comprises determining a result for a lost child tracking program.
- 15 14. The method of claim 1, wherein the step of accessing a database further comprises accessing a location corresponding to a requested range of novelty index values.
15. The method of claim 1, wherein the step of accessing a database further comprises accessing a novelty index value corresponding to a requested range of location values.
- 20 16. The method of claim 1, wherein the step of computing the result further comprises computing the result in the wireless device.
17. The method of claim 1, wherein the step of computing the result further comprises computing the result in a separate server coupled to the wireless device.
18. The method of claim 1, wherein the step of running a program further comprises
25 determining a result for an e-commerce program.

19. The method of claim 1, wherein the step of running a program further comprises determining a result for a sports results program.
20. The method of claim 1, wherein the step of running a program further comprises determining a result for a stock quotes program.
- 5 21. The method of claim 1, wherein the step of running a program further comprises determining a result for a weather forecast program.
22. The method of claim 1, wherein the step of running a program further comprises determining a result for an online travel program.
23. The method of claim 1, wherein the step of computing the result further comprises
10 downloading distinctive ringing tones.
24. The method of claim 1, wherein the step of computing the result further comprises exchanging multimedia messages that combine text with photographic content.
25. The method of claim 1, wherein the step of computing the result further comprises exchanging multimedia messages that combine text with image content.
- 15 26. The method of claim 1, wherein the step of computing the result further comprises exchanging multimedia messages that combine text with voice clip content.
27. The method of claim 1, wherein the step of computing the result further comprises exchanging multimedia messages.
28. The method of claim 1, wherein the step of computing the result further comprises
20 paying bills online.
29. The method of claim 1, wherein the step of computing the result further comprises delivering useful and informative advertising.
30. The method of claim 1, wherein the step of computing the result further comprises conducting transaction services from online merchants.

31. The method of claim 1, wherein the step of computing the result further comprises providing entertainment services.
32. A system for computing a result for a location, the result depending on how novel it is for a wireless device to occupy the location, comprising:
- 5 a processor;
- a memory coupled to the processor, programmed to perform the steps of:
- determining the location of a wireless device;
- computing a novelty index value for the location, the novelty index value
- characterizing how novel it is for the wireless device to occupy the
- 10 determined location;
- storing the novelty index value in a database;
- running a program to determine a result that depends on the novelty index
- value;
- accessing the database for information associated with the novelty index
- 15 value;
- and
- computing the result using said information.
33. The system of claim 32, which further comprises said processor being in the
- 20 wireless device.
34. A system for computing a result for a location, the result depending on how novel it is for a wireless device to occupy the location, comprising:
- a sensor in a wireless device for determining the location of a wireless
- device;
- 25 a processor;
- a memory coupled to the sensor and to the processor, programmed to
- perform the steps of:

computing a novelty index value for the location, the novelty index value characterizing how novel it is for the wireless device to occupy the determined location;

storing the novelty index value in a database;

5 running a program to determine a result that depends on the novelty index value;

accessing the database for information associated with the novelty index value; and

computing the result using said information.

10

35. The system of claim 34, which further comprises said processor being in the wireless device.

36. The system of claim 34, which further comprises said processor being in a separate server coupled to the wireless device..

15 37. A system for computing a result for a location, the result depending on how novel it is for a wireless device to occupy the location, comprising:

a sensor in a wireless device for determining the location of a wireless device;

a processor in a separate server coupled to the wireless device, the
20 processor

computing a novelty index value for the location, the novelty index value characterizing how novel it is for the wireless device to occupy the determined location;

a database coupled to the processor, for storing the novelty index value;

25 a processor in the wireless device, running a program to determine a result that depends on the novelty index value; and

said processor in the wireless device accessing the database for information associated with the novelty index value and computing the result using said information.

38. The system of claim 37, wherein the processor in the server computes a novelty index value which is proportional to how novel it is for the wireless device to occupy the location.
39. The system of claim 38, wherein the processor in the wireless device accesses a location corresponding to a requested range of novelty index values.
40. The system of claim 38, wherein the processor in the wireless device accesses a novelty index value corresponding to a requested range of location values.
41. A method to enable a wireless device to provide recommendations to its user that are appropriate to the device's current environment, comprising:
- receiving sensor signals characterizing a current environment of the wireless device;
 - processing the sensor signals with a context inference engine;
 - outputting a current context result from the processing by the context inference engine;
 - computing a novelty index value for the current context result, the novelty index value characterizing how novel it is for the wireless device to occupy the current context;
 - storing the novelty index value in a database;
 - running a program to determine a result that depends on the novelty index value;
 - accessing the database for information associated with the novelty index value; and
 - computing the result using said information.
42. The method of claim 41, wherein the processing of the sensor signals with the context inference engine is embodied as programmed instructions executed within the user's wireless device.
43. The method of claim 41, wherein the processing of the sensor signals with the context inference engine is embodied as programmed instructions executed within a separate network server in response to signals from the user's wireless device.
44. The method of claim 41, wherein the sensor signals are selected from the group consisting of positioning signals, touch signals, audio signals, compass signals,

ambient light signals, ambient temperature signals, three-axis acceleration signals, time signals, and the device's operational mode signals.

45. The method of claim 41, wherein the step of accessing a database further comprises accessing a context value corresponding to a requested range of novelty index values.

46. The method of claim 41, wherein the step of accessing a database further comprises accessing a novelty index value corresponding to a requested range of context values.

47. A method to enable a wireless device to provide recommendations to its user that are appropriate to the device's current environment, comprising:

providing sensor signals characterizing a current environment of the wireless device;

processing the sensor signals and providing a current context result;

computing a novelty index value for the current context, the novelty index

value characterizing how novel it is for the wireless device to occupy the current context;

storing recommendations associated the novelty index value; and

accessing the database for recommendations associated with the novelty index value.

48. A system to provide recommendations to its user that are correlated to a wireless device's current environment, comprising:

a sensor for providing sensor signals characterizing a current environment of the wireless device;

a context inference engine coupled to the sensor, for processing the sensor signals and providing a current context result;

a processor coupled to the context inference engine, for computing a

novelty index value for the current context, the novelty index value characterizing how novel it is for the wireless device to occupy the current context;

a database coupled to the processor, for storing recommendations associated the novelty index value; and

said processor accessing the database for recommendations associated with the novelty index value.

49. The system of claim 48, which further comprises said processor being in a separate server from the wireless device, for computing a novelty index value which is proportional to how novel it is for the wireless device to occupy the current context.
50. The system of claim 49, which further comprises a processor in the wireless device, for accessing the database with a context value corresponding to a requested range of novelty index values.
51. The system of claim 49, which further comprises a processor in the wireless device, for accessing a novelty index value corresponding to a requested range of context values.
52. The system of claim 48, wherein the sensor signals are selected from the group consisting of positioning signals, touch signals, audio signals, compass signals, ambient light signals, ambient temperature signals, three-axis acceleration signals, time signals, and the device's operational mode signals.
53. A method for computing a result for a location, the result depending on how novel it is for a wireless device to occupy the location, comprising:
- determining the location of a wireless device;
 - computing a novelty index value for the location, the novelty index value characterizing how novel it is for the wireless device to occupy the determined location;
 - storing the novelty index value in a database;
 - running a program in a second terminal to determine a result that depends on the novelty index value;
 - accessing with the second terminal the database for information associated with the novelty index value; and
 - computing the result using said information.
54. A system for computing a result for a location, the result depending on how novel it is for a wireless device to occupy the location, comprising:

- a sensor in a wireless device, for determining the location of the wireless device;
- a server coupled to the wireless device, for computing a novelty index value for the location, the novelty index value characterizing how novel it is for the wireless device to occupy the determined location;
- a database coupled to the server, for storing the novelty index value;
- a second terminal programmed to determine a result that depends on the novelty index value; and
- the second terminal accessing the database for information associated with the novelty index value and computing the result using said information.
55. A system of claim 54, which further comprises said second terminal being a second wireless device.
56. A system for computing a result for a location, the result depending on how novel it is for a wireless device to occupy the location, comprising:
- a sensor in a wireless device for determining the location of a wireless device;
- a first processor;
- a first memory coupled to the sensor and to the first processor, programmed to perform the steps of:
- computing a novelty index value for the location, the novelty index value characterizing how novel it is for the wireless device to occupy the determined location;
- storing the novelty index value in a database;
- a second processor;
- a second memory coupled to the second processor, programmed to perform the steps of:
- determining a result that depends on the novelty index value;

accessing the database for information associated with the
novelty index value; and
computing the result using said information.

57. A system of claim 56, which further comprises said first processor being in the
5 wireless device.

58. A system of claim 56, which further comprises said second processor being in a
second wireless device.

59. A system for computing a result for a location, the result depending on how novel
it is for a wireless device to occupy the location, comprising:

10 a sensor in a wireless device for determining the location of a wireless
device;

a first processor in a separate server coupled to the wireless
device, the first processor computing a novelty
index value for the location, the novelty index value
15 characterizing how novel

it is for the wireless device to occupy the determined
location;

a database coupled to the first processor, for storing the novelty index
value;

20 a second processor in a second terminal, running a program to determine a
result that depends on the novelty index value; and
said second processor accessing the database for information associated
with the novelty index value and computing the result using said
information.

25 60. The system of claim 59, wherein the first processor in the server computes a
novelty index value which is proportional to how novel it is for the wireless device
to occupy the location.

61. The system of claim 60, wherein the second processor in the second terminal
accesses a location corresponding to a requested range of novelty index values.

30 62. The system of claim 60, wherein the second processor in the second terminal
accesses a novelty index value corresponding to a requested range of location
values.

63. A method to provide recommendations that are appropriate to a wireless device's environment, comprising:
- receiving sensor signals characterizing an environment of the wireless device;
 - 5 processing the sensor signals with a context inference engine;
 - outputting a context result from the processing by the context inference engine;
 - computing a novelty index value for the context result, the novelty index value characterizing how novel it is for the wireless device to
 - 10 occupy the context;
 - storing the novelty index value in a database;
 - running a program in a second terminal to determine a result that depends on the novelty index value;
 - accessing with the second terminal the database for information associated
 - 15 with the novelty index value; and
 - computing the result using said information.
64. A method to provide recommendations that are appropriate for a wireless device's environment, comprising:
- providing sensor signals characterizing a current environment of the
 - 20 wireless device;
 - processing the sensor signals and providing a current context result;
 - computing a novelty index value for the current context, the novelty index value characterizing how novel it is for the wireless device to
 - occupy the current context;
 - 25 storing recommendations associated the novelty index value; and
 - accessing with the second terminal the database for recommendations associated with the novelty index value.
65. A method for changing a wireless device configuration for a location, the
- 30 configuration depending on how novel it is for the wireless device to occupy the location, comprising:
- determining the location of a wireless device;

computing a novelty index value for the location, the novelty index value
characterizing how novel it is for the wireless device to occupy the
determined location;
storing the novelty index value in a database;
5 running a program to determine a result that depends on the novelty index
value;
accessing the database for information associated with the novelty index
value;
and
10 changing a configuration of the wireless device using said information.

66. A system for changing a wireless device configuration for a location, the
configuration depending on how novel it is for a wireless device to occupy the
location, comprising:
- 15 a sensor in a wireless device, for determining the location of the wireless
device;
a server coupled to the wireless device, for computing a novelty index
value for the location, the novelty index value characterizing how
novel it is for the wireless device to occupy the determined
20 location;
a database coupled to the server, for storing the novelty index value;
a second terminal programmed to determine a result that depends on the
novelty index value;
the second terminal accessing the database for information associated with
25 the novelty index value and computing the result using said
information; and
said wireless device changing its configuration using said result received
from said second terminal.
67. A system of claim 66, which further comprises said second terminal being a
30 second wireless device.

68. A system for changing a wireless device configuration for a location, the configuration depending on how novel it is for a wireless device to occupy the location, comprising:

5 a sensor in a wireless device for determining the location of a wireless device;

a first processor in a separate server coupled to the wireless device, the first processor computing a novelty index value for the location, the novelty index value characterizing how novel it is for the wireless device to occupy the determined location;

10 a database coupled to the first processor, for storing the novelty index value;

a second processor in a second terminal, running a program to determine a result that depends on the novelty index value;

15 said second processor accessing the database for information associated with the novelty index value and computing the result using said information; and

said wireless device changing its configuration using said result received from said second terminal.

69. The system of claim 68, wherein the first processor in the server computes a novelty index value which is proportional to how novel it is for the wireless device to occupy the location.

70. The system of claim 68, wherein the second processor in the second terminal accesses a location corresponding to a requested range of novelty index values.

71. The system of claim 68, wherein the second processor in the second terminal accesses a novelty index value corresponding to a requested range of location values.

72. A method to for changing a wireless device configuration depending on how novel it is for a wireless device to occupy an environment, comprising:

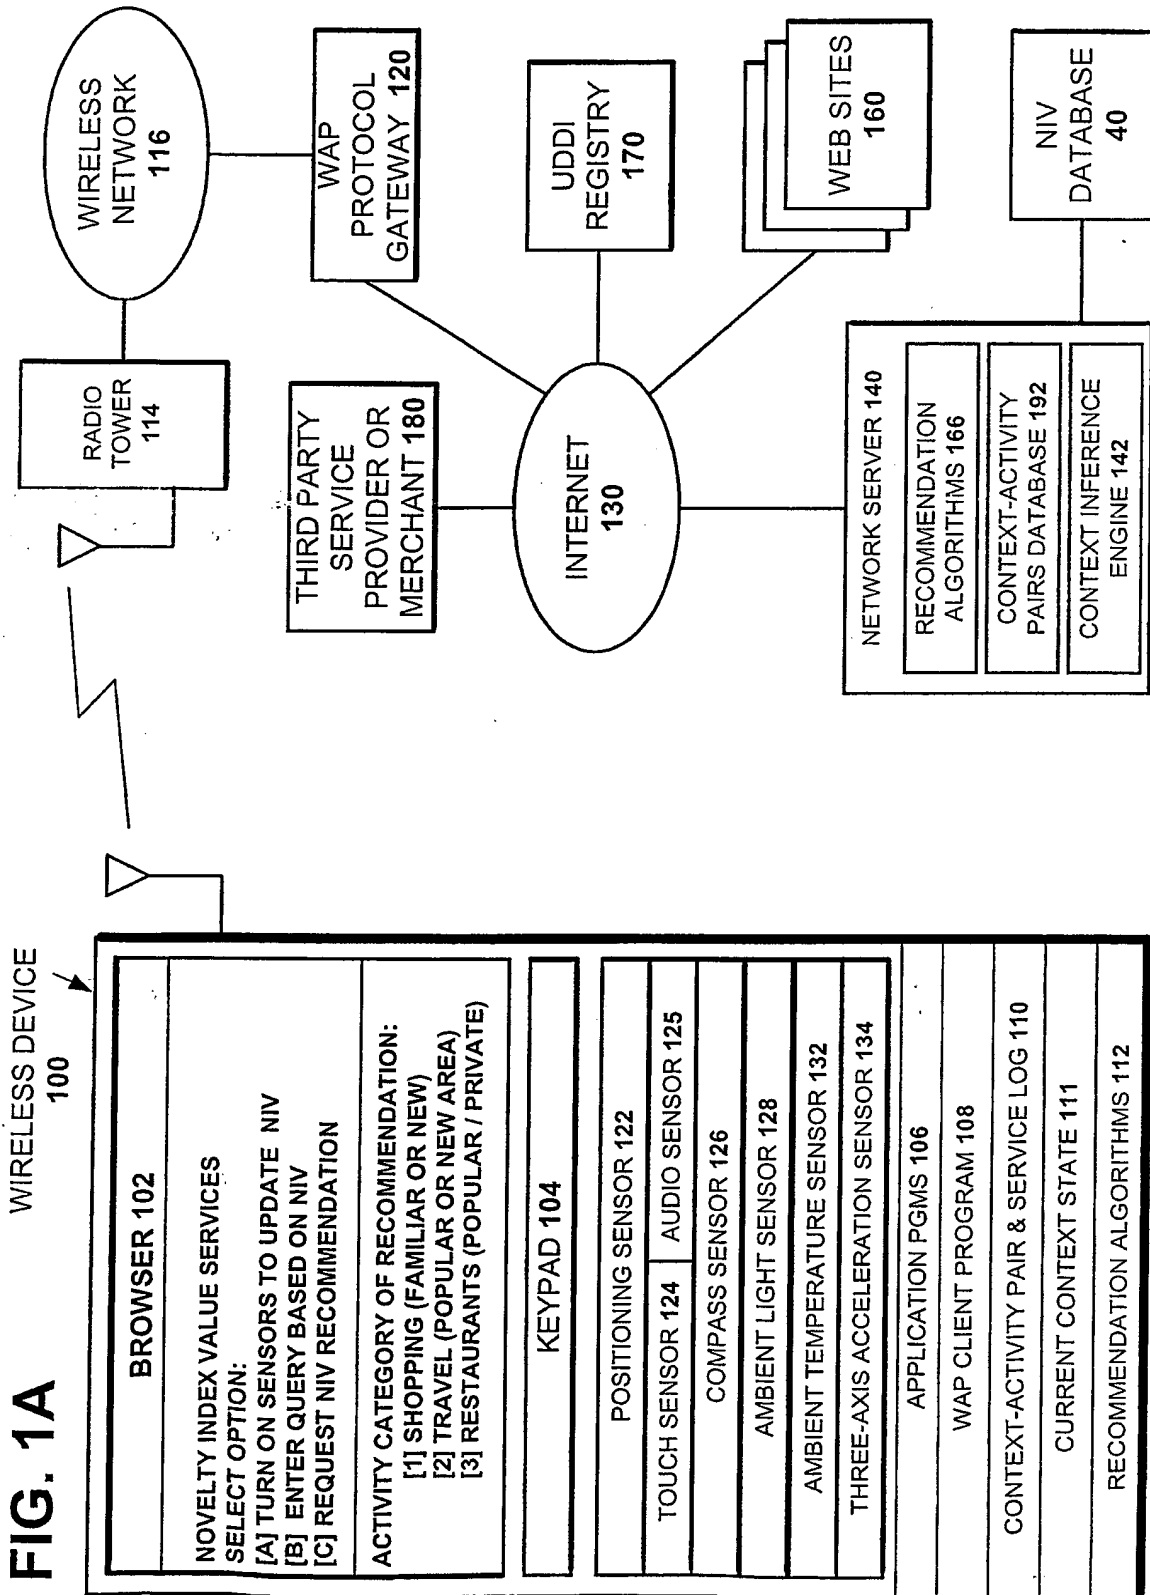
30 receiving sensor signals characterizing an environment of the wireless device;

processing the sensor signals with a context inference engine;

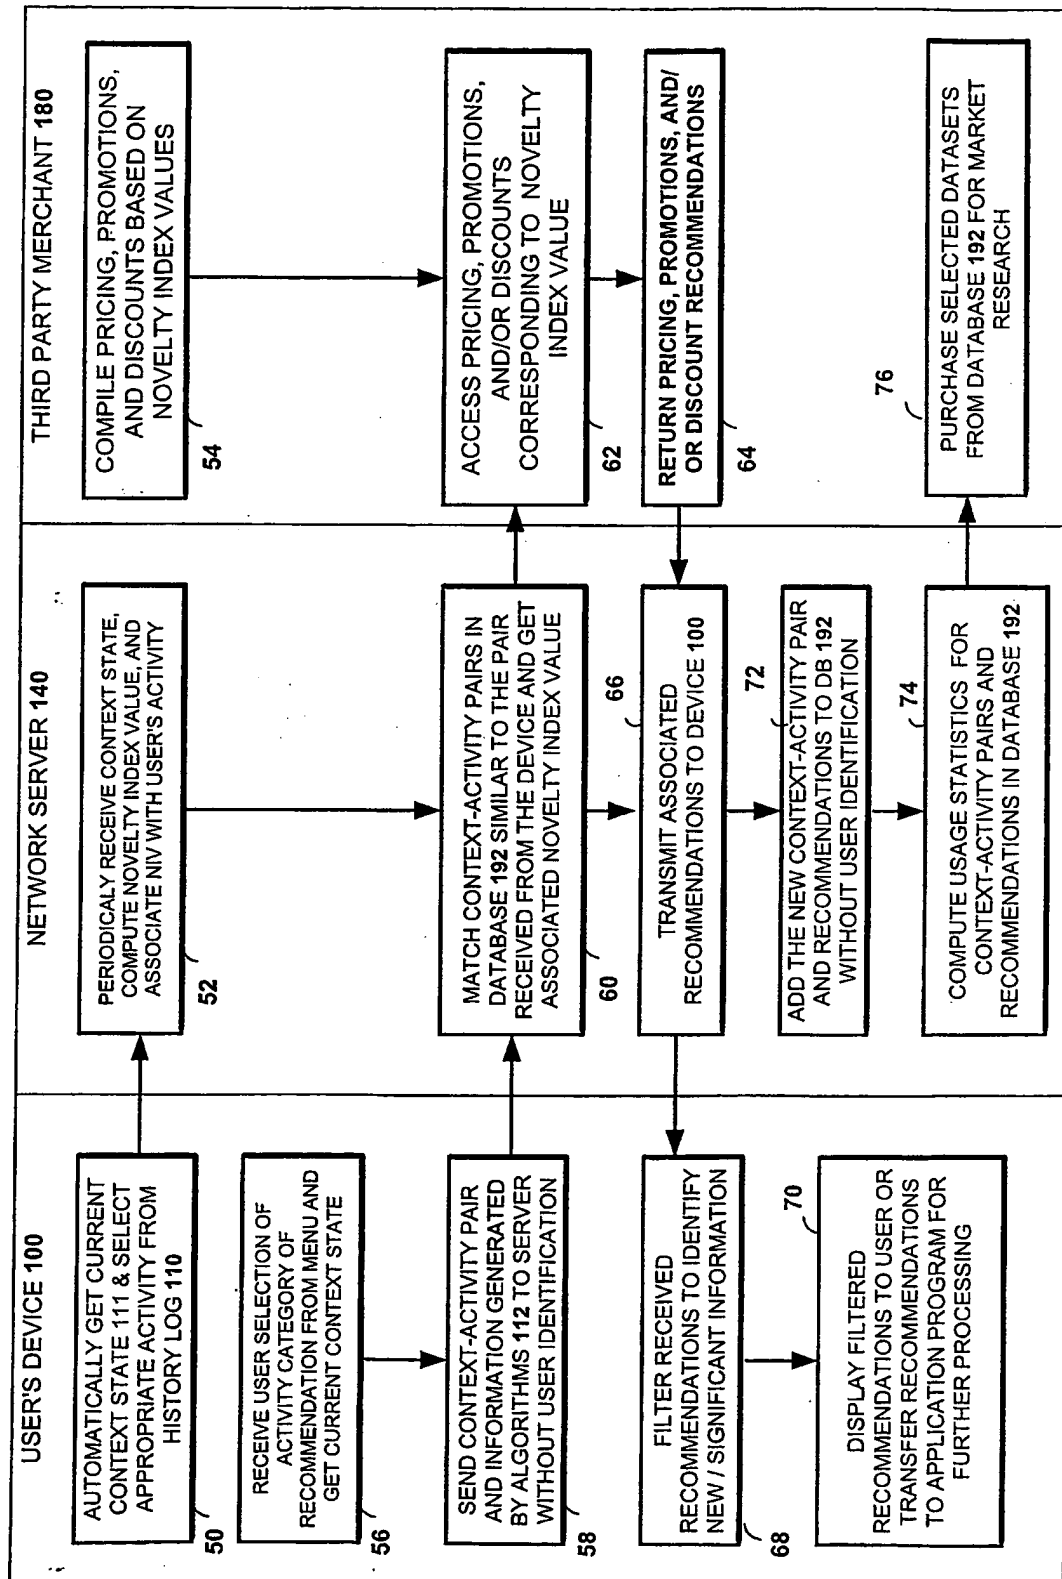
- outputting a context result from the processing by the context inference engine;
- computing a novelty index value for the context result, the novelty index value characterizing how novel it is for the wireless device to occupy the context;
- storing the novelty index value in a database;
- running a program in a second terminal to determine a result that depends on the novelty index value;
- accessing with the second terminal the database for information associated with the novelty index value; and
- changing a configuration of the wireless device using said information received from said second terminal.
73. The method of claim 72, wherein the processing of the sensor signals with the context inference engine is embodied as programmed instructions executed within the wireless device.
74. The method of claim 72, wherein the processing of the sensor signals with the context inference engine is embodied as programmed instructions executed within a separate network server in response to signals from the wireless device.
75. The method of claim 72, wherein the sensor signals are selected from the group consisting of positioning signals, touch signals, audio signals, compass signals, ambient light signals, ambient temperature signals, three-axis acceleration signals, time signals, and the device's operational mode signals.
76. The method of claim 72, wherein the step of accessing with the second terminal a database further comprises accessing with the second terminal a context value corresponding to a requested range of novelty index values.
77. The method of claim 72, wherein the step of accessing with the second terminal a database further comprises accessing with the second terminal a novelty index value corresponding to a requested range of context values.
78. A method for changing a wireless device configuration depending on how novel it is for a wireless device to occupy an environment, comprising:
- providing sensor signals characterizing a current environment of the wireless device;

processing the sensor signals and providing a current context result;
computing a novelty index value for the current context, the novelty index
value characterizing how novel it is for the wireless device to
occupy the current context;
5 storing information associated the novelty index value;
accessing the database for information associated with the novelty index
value;
and
changing a configuration of the wireless device using said accessed
10 information.

79. A system for changing a wireless device configuration depending on how novel it
is for a wireless device to occupy an environment, comprising:
a sensor for providing sensor signals characterizing a current environment
15 of the wireless device;
a context inference engine coupled to the sensor, for processing the sensor
signals and providing a current context result;
a processor coupled to the context inference engine, for computing a
novelty index value for the current context, the novelty index value
20 characterizing how novel it is for the wireless device to occupy the
current context;
a database coupled to the processor, for storing recommendations
associated the novelty index value; and
a second terminal accessing the database for recommendations associated
25 with the novelty index value and
said wireless device changing a configuration using said recommendations
received from said second terminal.



3 / 22

FIG. 1B**NIV-DATA GATHERING AND NIV-BASED RECOMMENDATIONS**

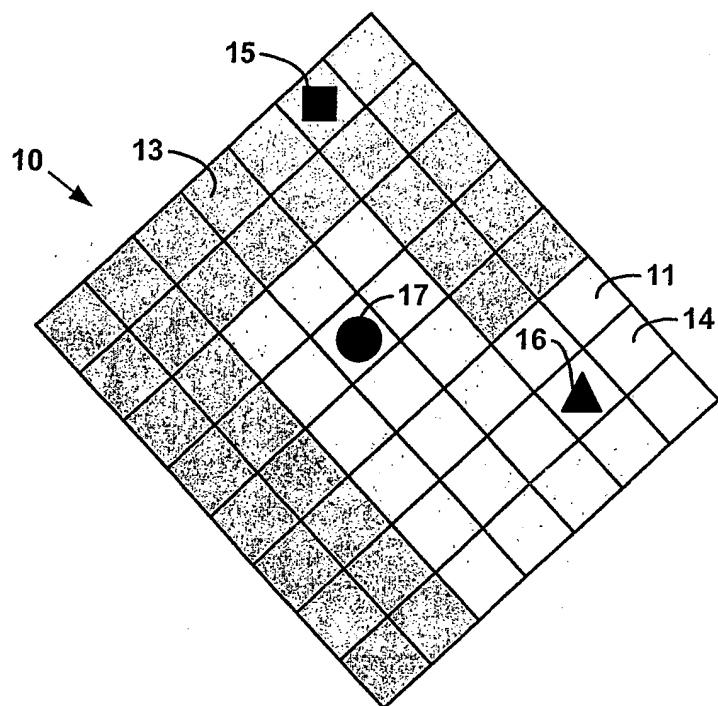


Figure 2

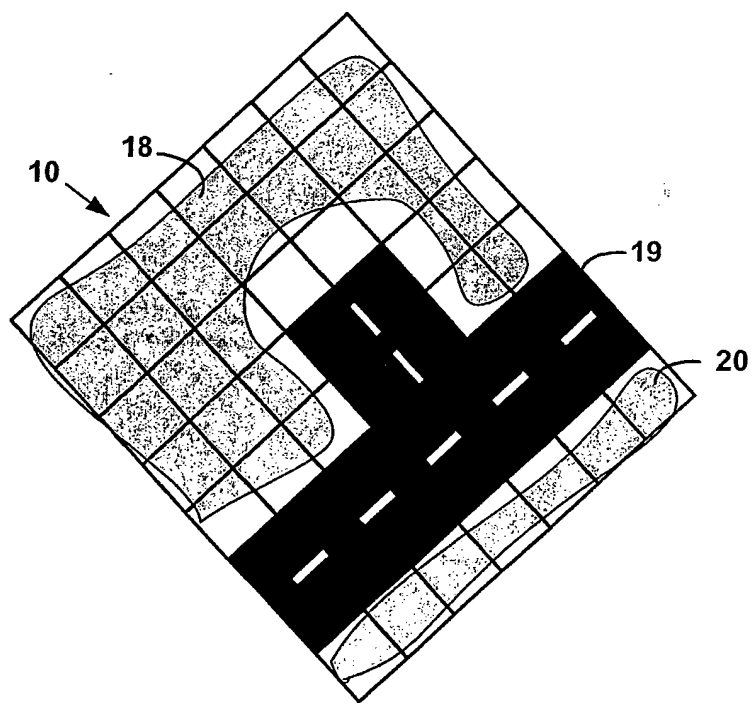
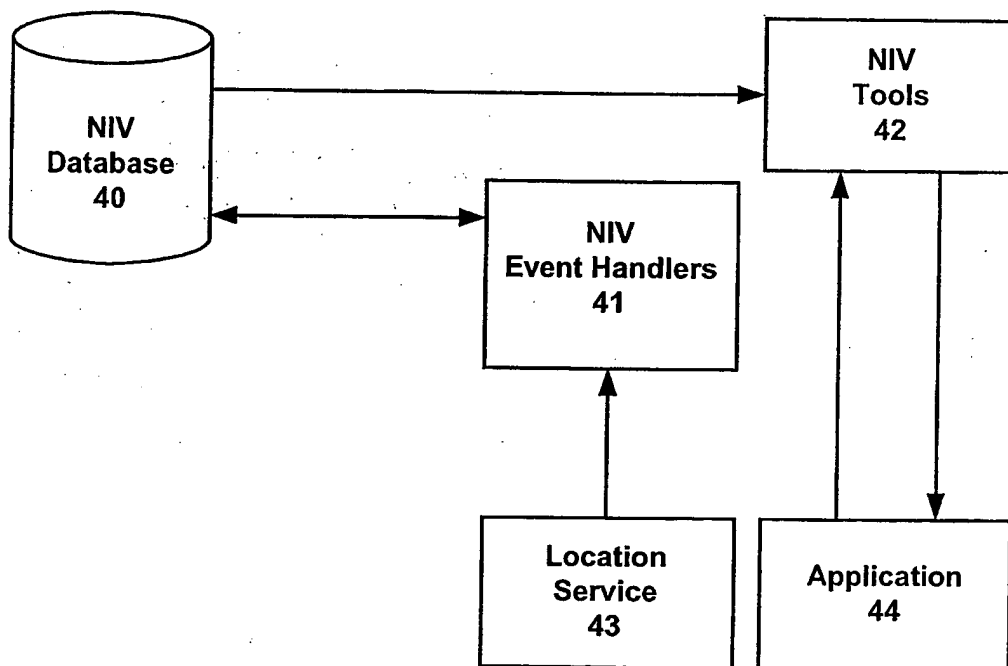


Figure 2A

5 / 22

**Figure 3**

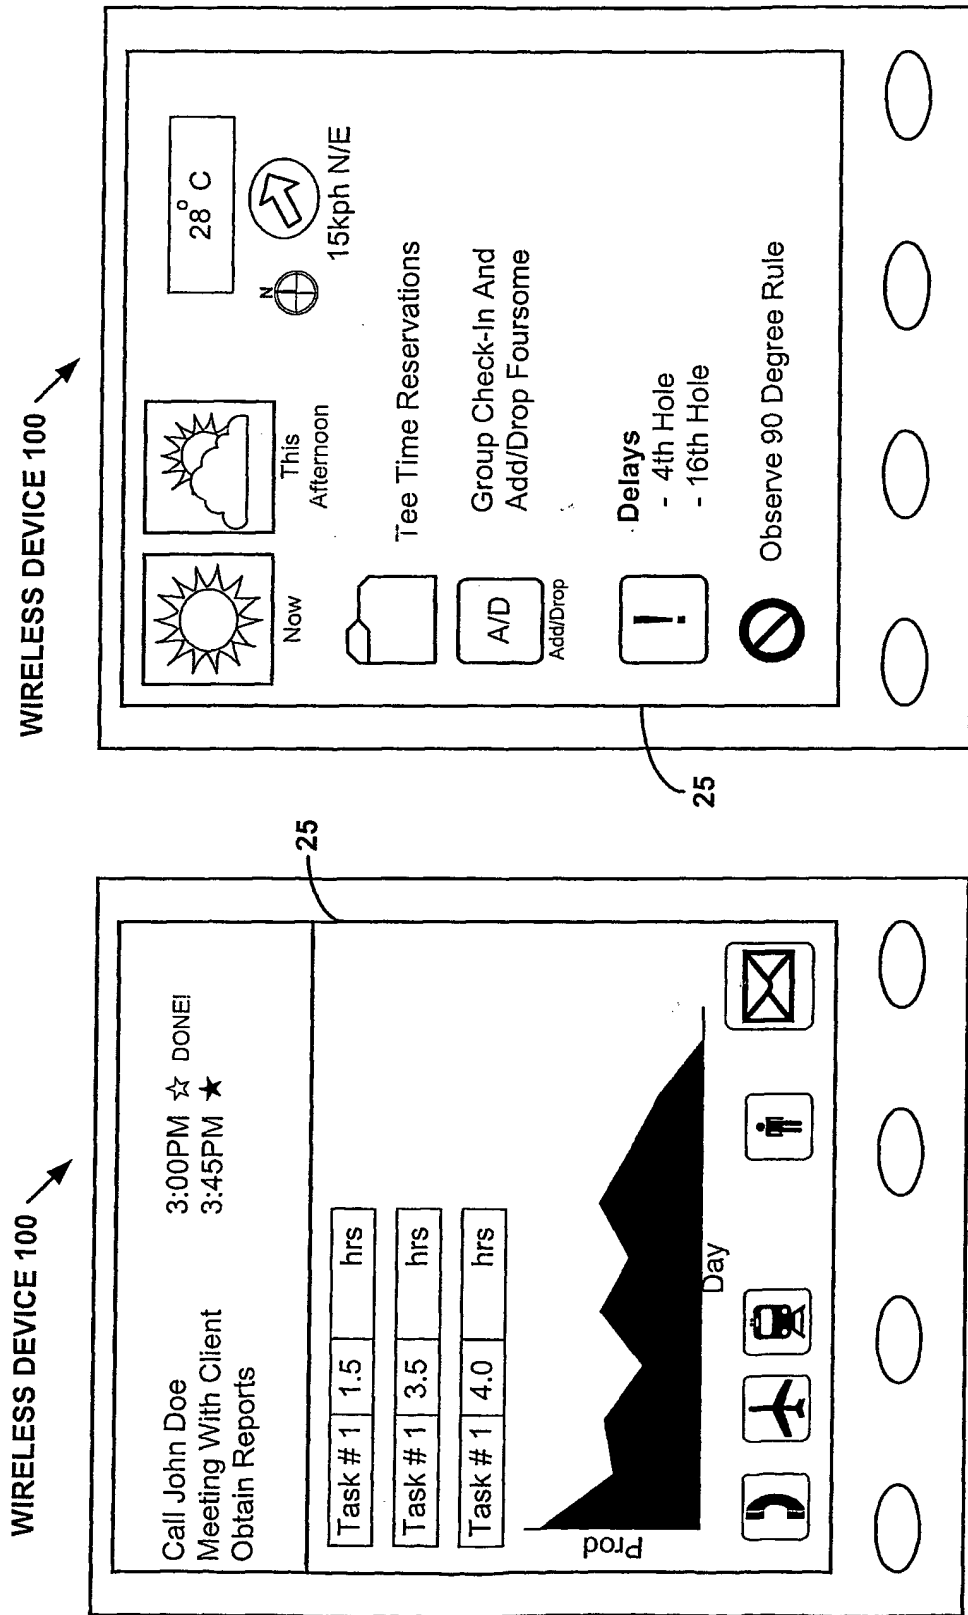


Figure 4A

Figure 4

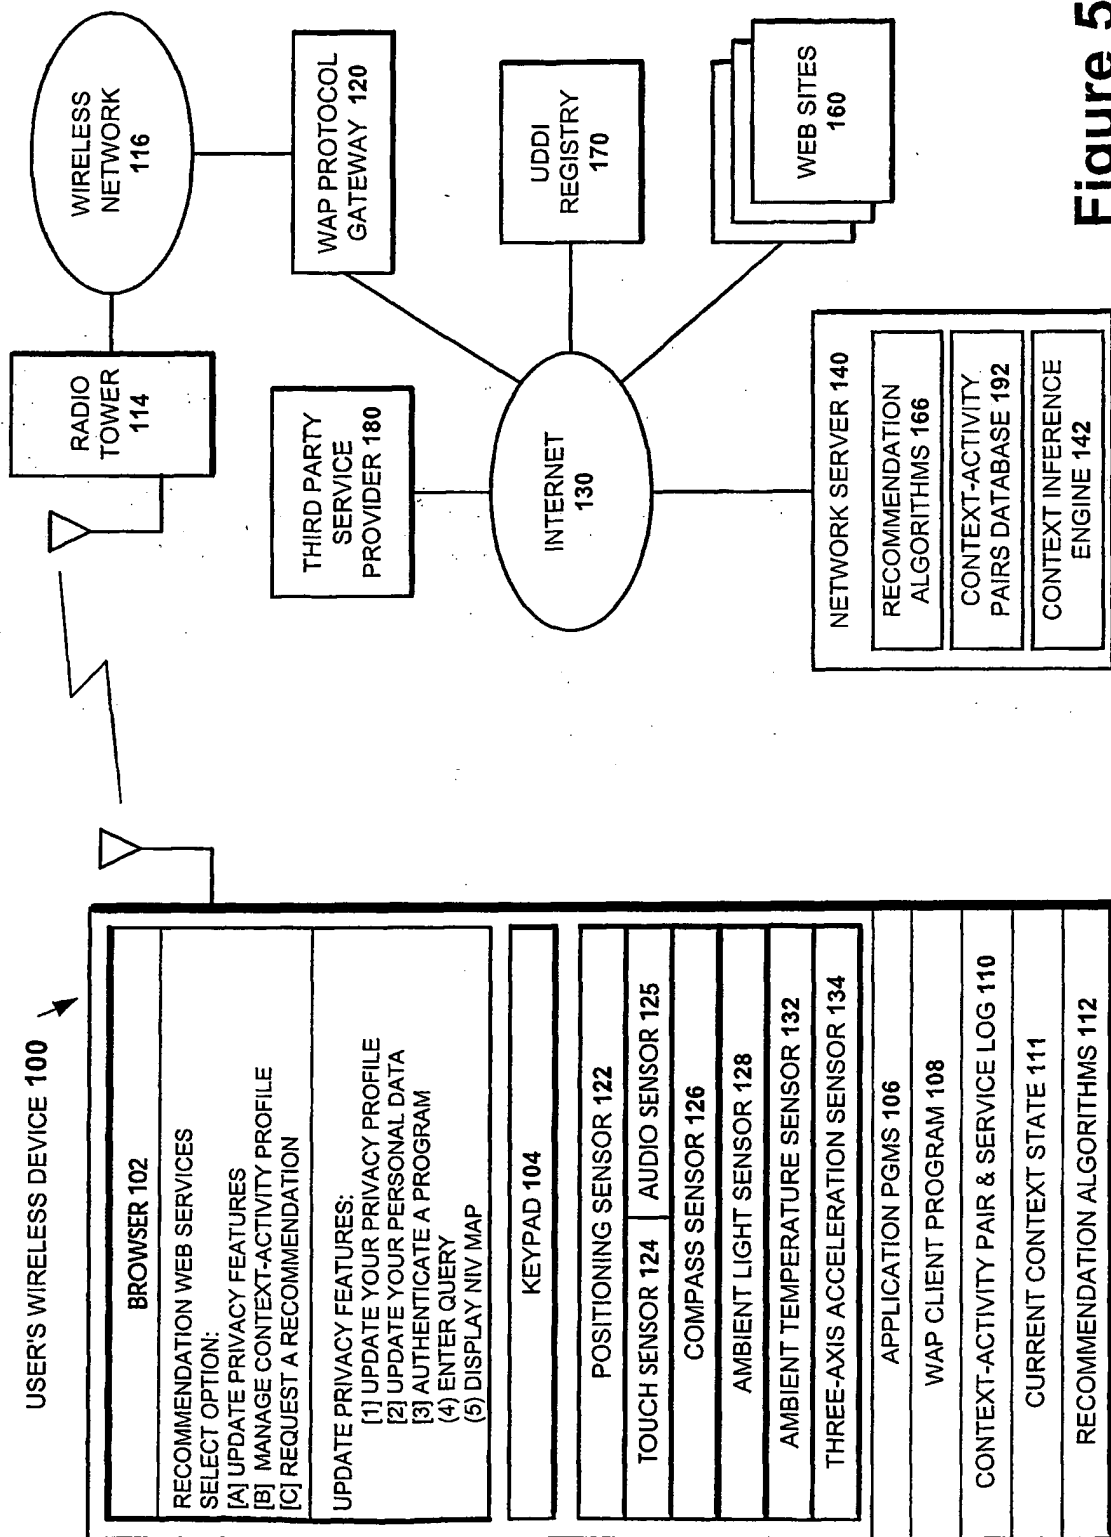
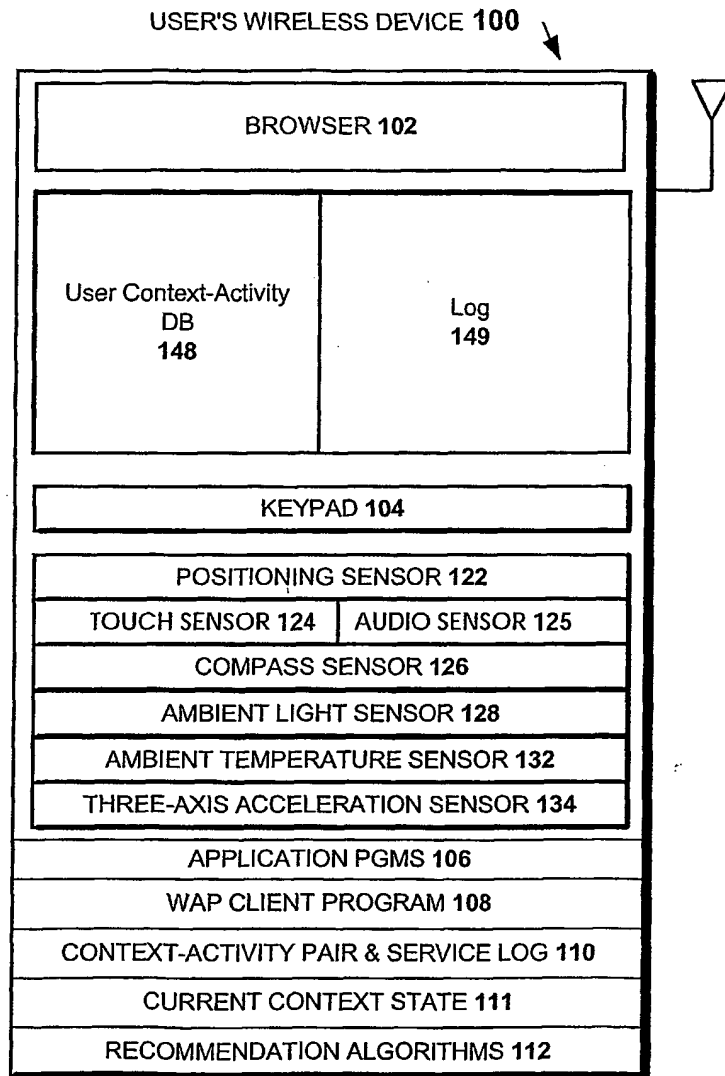


Figure 5

**Figure 6**

9/22

USER'S WIRELESS DEVICE 100

BROWSER 102
UPDATE PRIVACY FEATURES: <ul style="list-style-type: none"> [1] UPDATE YOUR PRIVACY PROFILE <ul style="list-style-type: none"> [a] Add a local program to permissions list [b] Remove a local program from list [c] Add a server program to permissions list [d] Remove a server program from list [e] Add a network program to permissions list [f] Remove a network program from list [2] UPDATE YOUR PERSONAL DATA <ul style="list-style-type: none"> [a] Update server database [b] Update network database
KEYPAD 104
POSITIONING SENSOR 122
TOUCH SENSOR 124
COMPASS SENSOR 126
AMBIENT LIGHT SENSOR 128
AMBIENT TEMPERATURE SENSOR 132
THREE-AXIS ACCELERATION SENSOR 134

Figure 6A

USER'S WIRELESS DEVICE 100

BROWSER 102
UPDATE PRIVACY FEATURES: <ul style="list-style-type: none"> [3] AUTHENTICATE A PROGRAM <ul style="list-style-type: none"> [a] Request program's public key certificate [b] Verify certificate signatures [c] Verify validity time [d] Verify revocation status [e] Check if certificate authority is on trust list [f] Flag program as authenticated [4] REGISTER A PROGRAM <ul style="list-style-type: none"> [a] When can the accesses take place [b] What data can be accessed
KEYPAD 104
POSITIONING SENSOR 122
TOUCH SENSOR 124
COMPASS SENSOR 126
AMBIENT LIGHT SENSOR 128
AMBIENT TEMPERATURE SENSOR 132
THREE-AXIS ACCELERATION SENSOR 134

Figure 6B

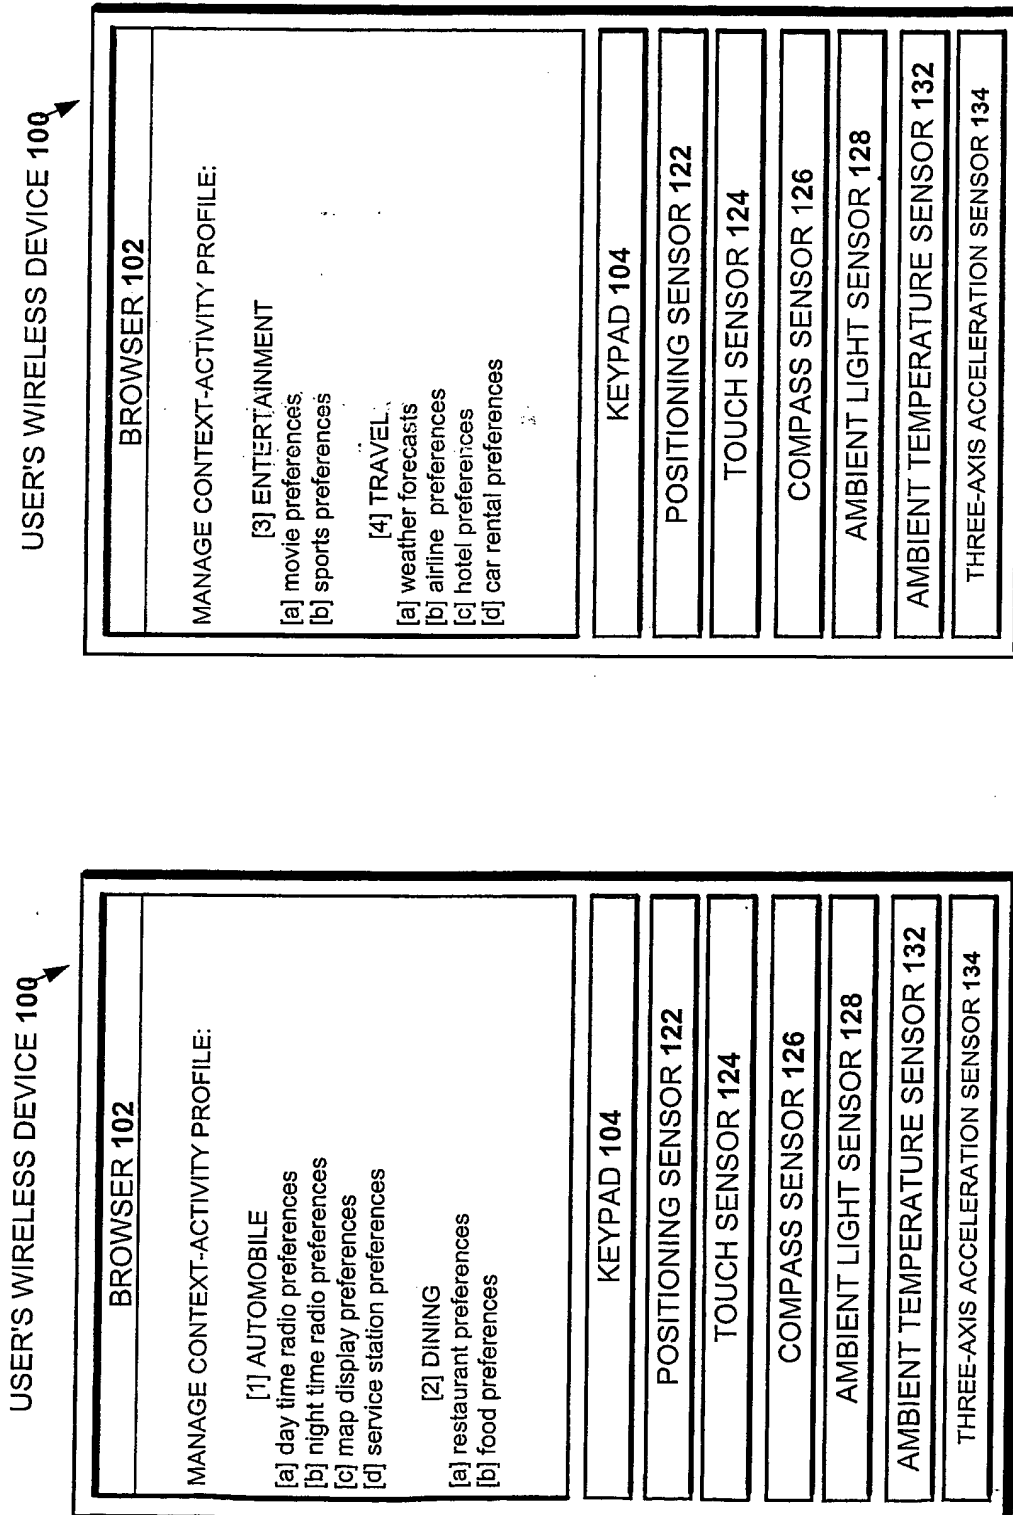


Figure 6C

Figure 6D

USER'S WIRELESS DEVICE 100

BROWSER 102
<p>REQUEST A RECOMMENDATION:</p> <p>[1] AUTOMOBILE ACTIVITIES</p> <p>[a] request day time radio recommendation</p> <p>[b] request night time radio recommendation</p> <p>[c] request map recommendation</p> <p>[d] request service station recommendation</p> <p>[2] DINING ACTIVITIES</p> <p>[a] request restaurant recommendation</p> <p>[b] request food recommendation</p>
KEYPAD 104
POSITIONING SENSOR 122
TOUCH SENSOR 124
COMPASS SENSOR 126
AMBIENT LIGHT SENSOR 128
AMBIENT TEMPERATURE SENSOR 132
THREE-AXIS ACCELERATION SENSOR 134

Figure 6E

USER'S WIRELESS DEVICE 100

BROWSER 102
<p>REQUEST A RECOMMENDATION:</p> <p>[3] ENTERTAINMENT ACTIVITIES</p> <p>[a] request movie recommendation</p> <p>[b] request sports recommendation</p> <p>[4] TRAVEL ACTIVITIES</p> <p>[a] request weather forecasts</p> <p>[b] request airline recommendation</p> <p>[c] request hotel recommendation</p> <p>[d] request car rental recommendation</p>
KEYPAD 104
POSITIONING SENSOR 122
TOUCH SENSOR 124
COMPASS SENSOR 126
AMBIENT LIGHT SENSOR 128
AMBIENT TEMPERATURE SENSOR 132
THREE-AXIS ACCELERATION SENSOR 134

Figure 6F

USER'S WIRELESS DEVICE 100

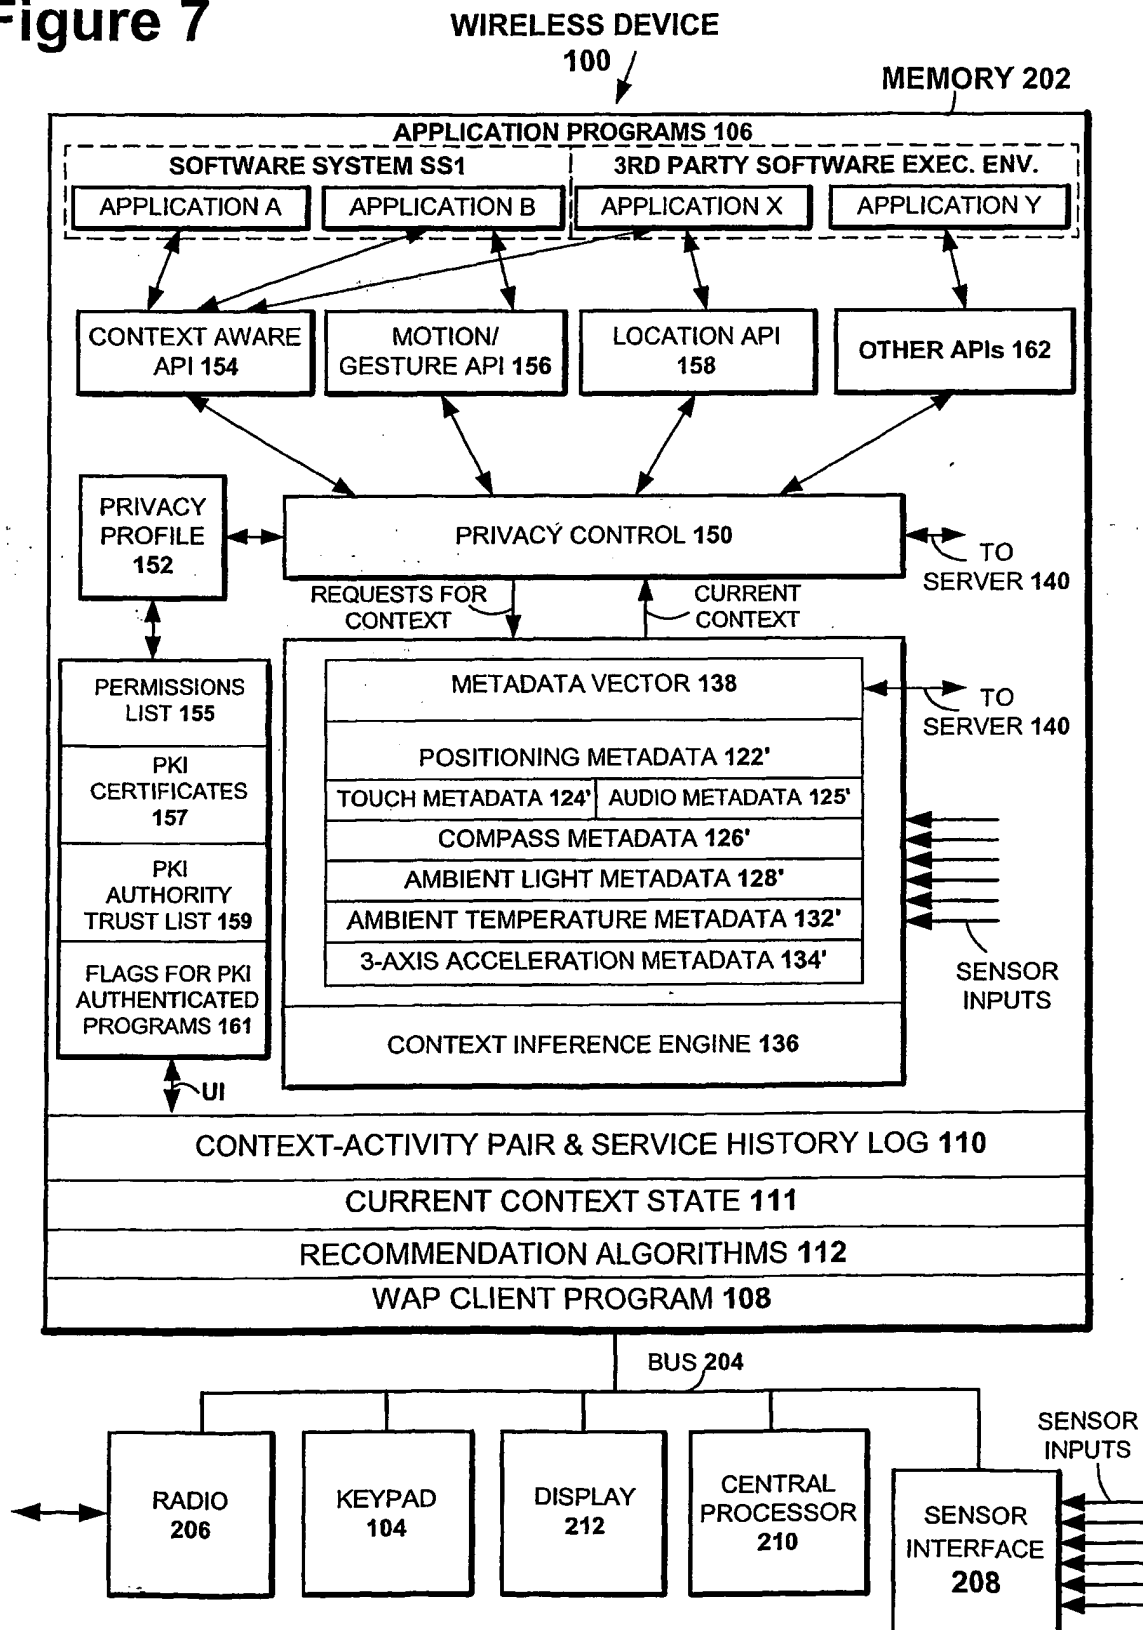
BROWSER 102
ACTIVITY: DINING - restaurant CONTEXT: LOCAL TIME: 2001/05/08/8:00 PM LOCATION: Beale Street, Memphis, TN LIGHT LEVEL - Street Lights /Night AMBIENT TEMPERATURE - 22 C SPEED - ACCELERATION - 0 SERVICE RECOMMEN DATION S: Joe's Beef Barbecue Restaurant Elvis' Place The Blues Diner
KEYPAD 104
POSITIONING SENSOR 122
TOUCH SENSOR 124
COMPASS SENSOR 126
AMBIENT LIGHT SENSOR 128
AMBIENT TEMPERATURE SENSOR 132
THREE-AXIS ACCELERATION SENSOR 134

Figure 6G

USER'S WIRELESS DEVICE 100

BROWSER 102
ACTIVITY: DINING - restaurant CONTEXT: LOCAL TIME: 2001/06/08/7:30 AM LOCATION: Beale Street, Memphis, TN LIGHT LEVEL - Daylight AMBIENT TEMPERATURE - 16 C SPEED - ACCELERATION - 0 SERVICE RECOMMEN DATION S: Pancake Restaurant Great Start Diner Betty's Homestyle Breakfast
KEYPAD 104
POSITIONING SENSOR 122
TOUCH SENSOR 124
COMPASS SENSOR 126
AMBIENT LIGHT SENSOR 128
AMBIENT TEMPERATURE SENSOR 132
THREE-AXIS ACCELERATION SENSOR 134

Figure 6H

Figure 7

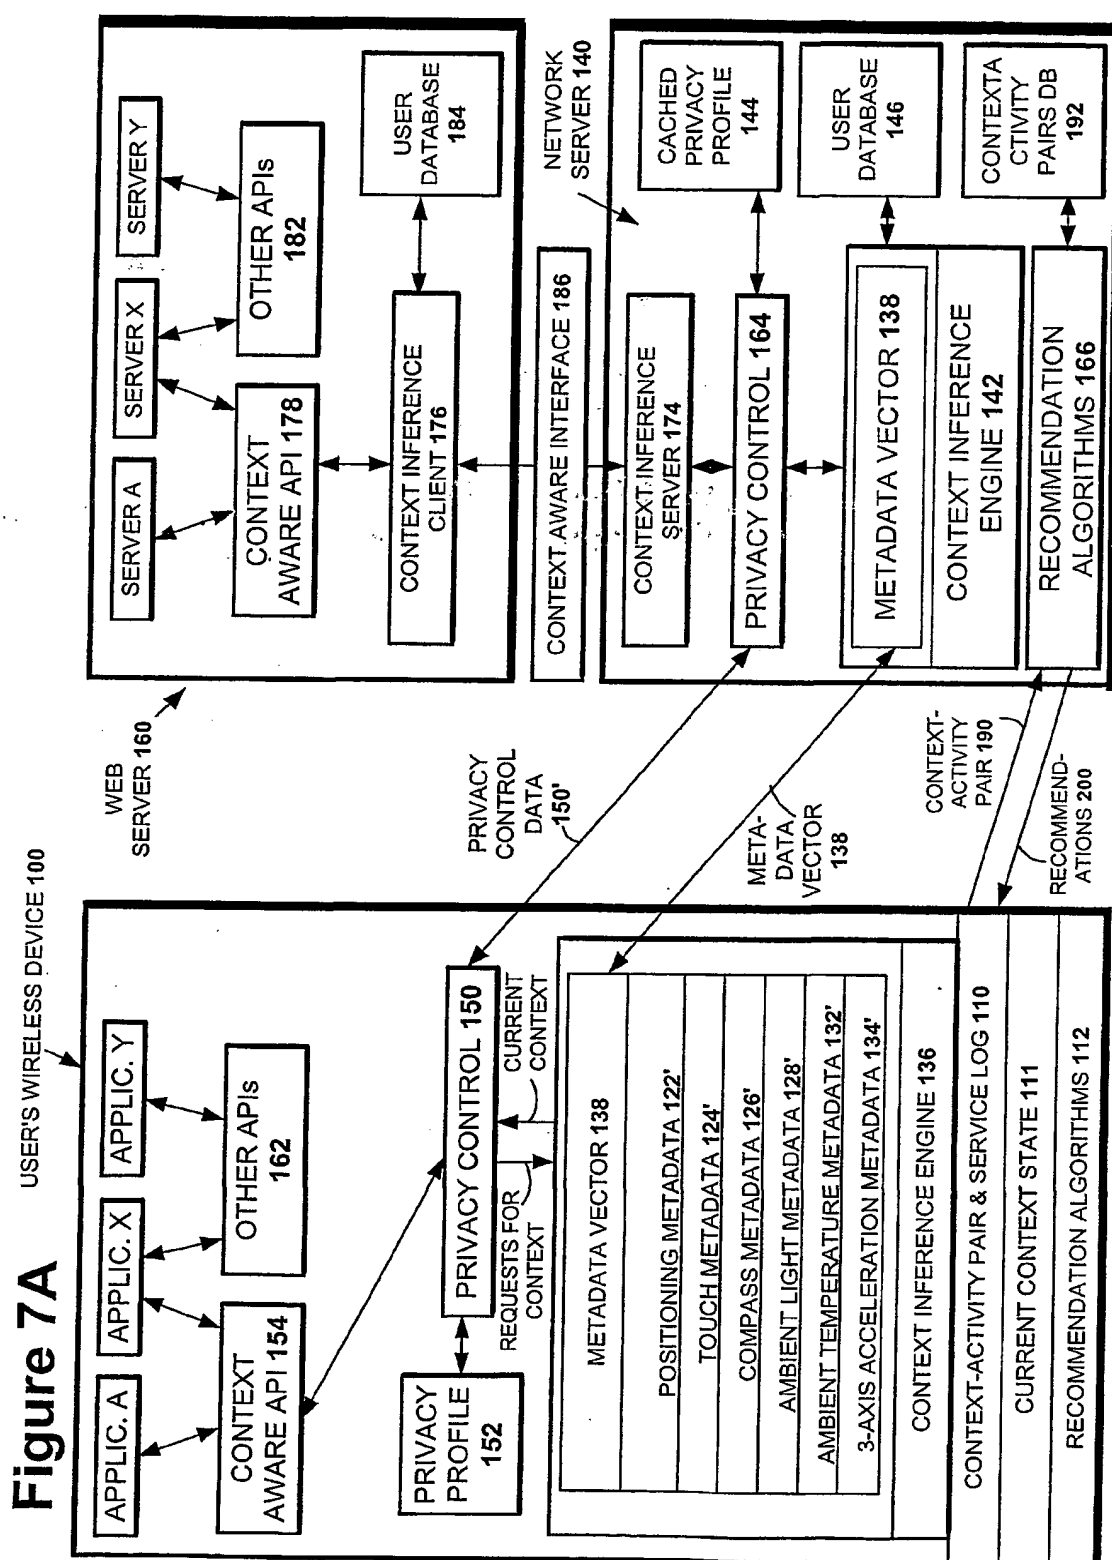


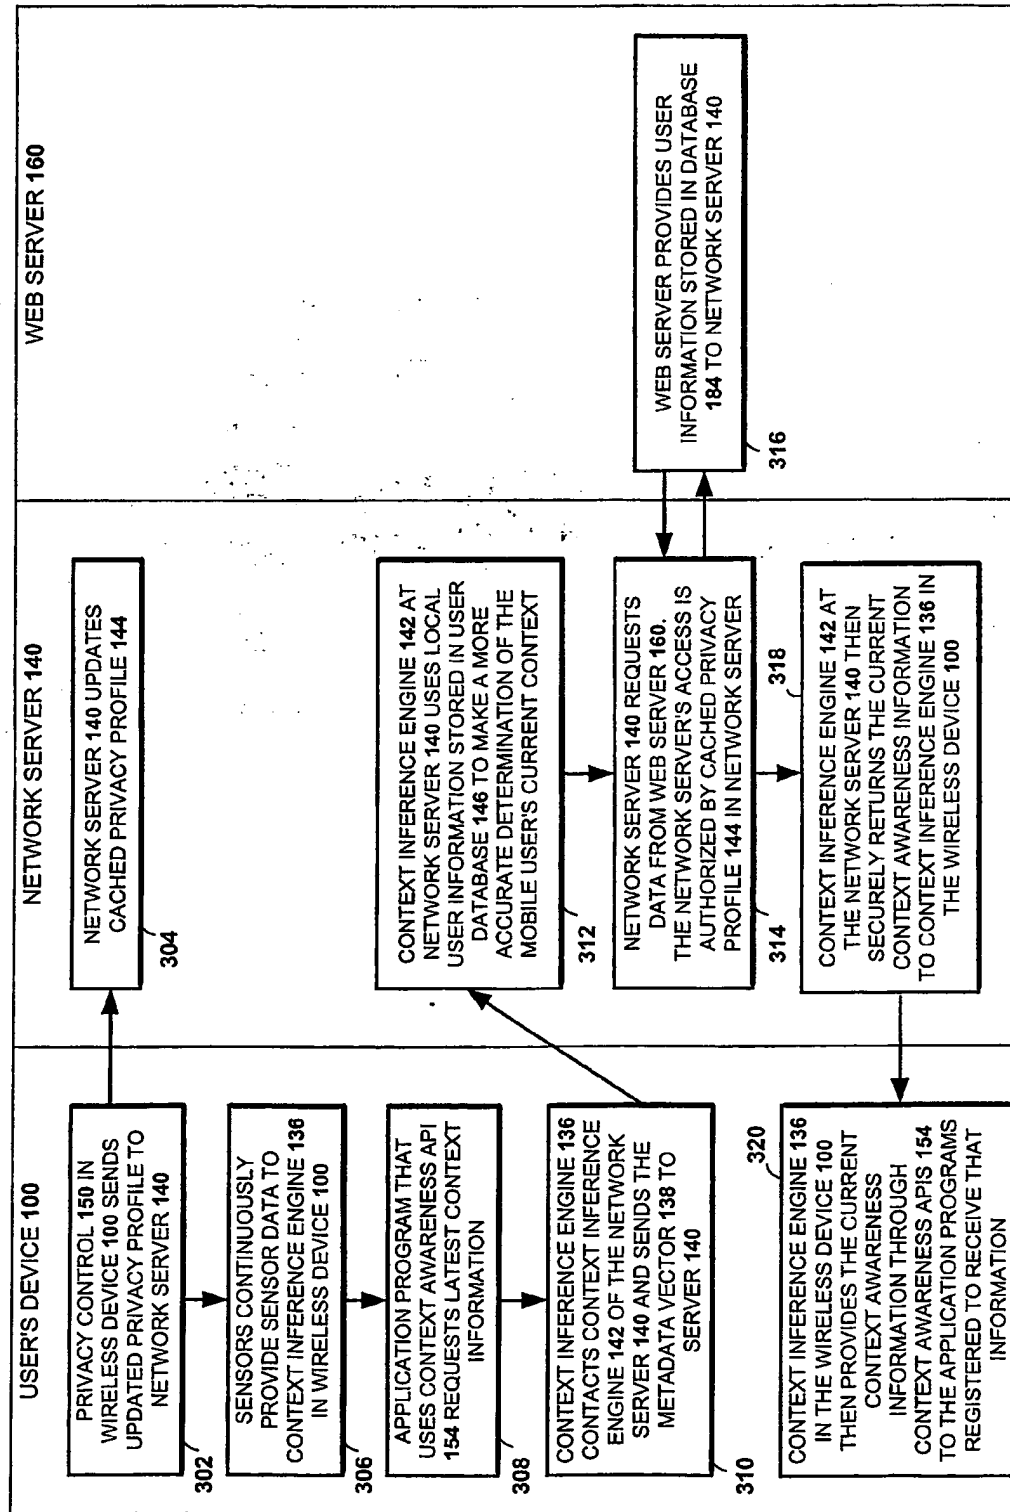
Figure 8

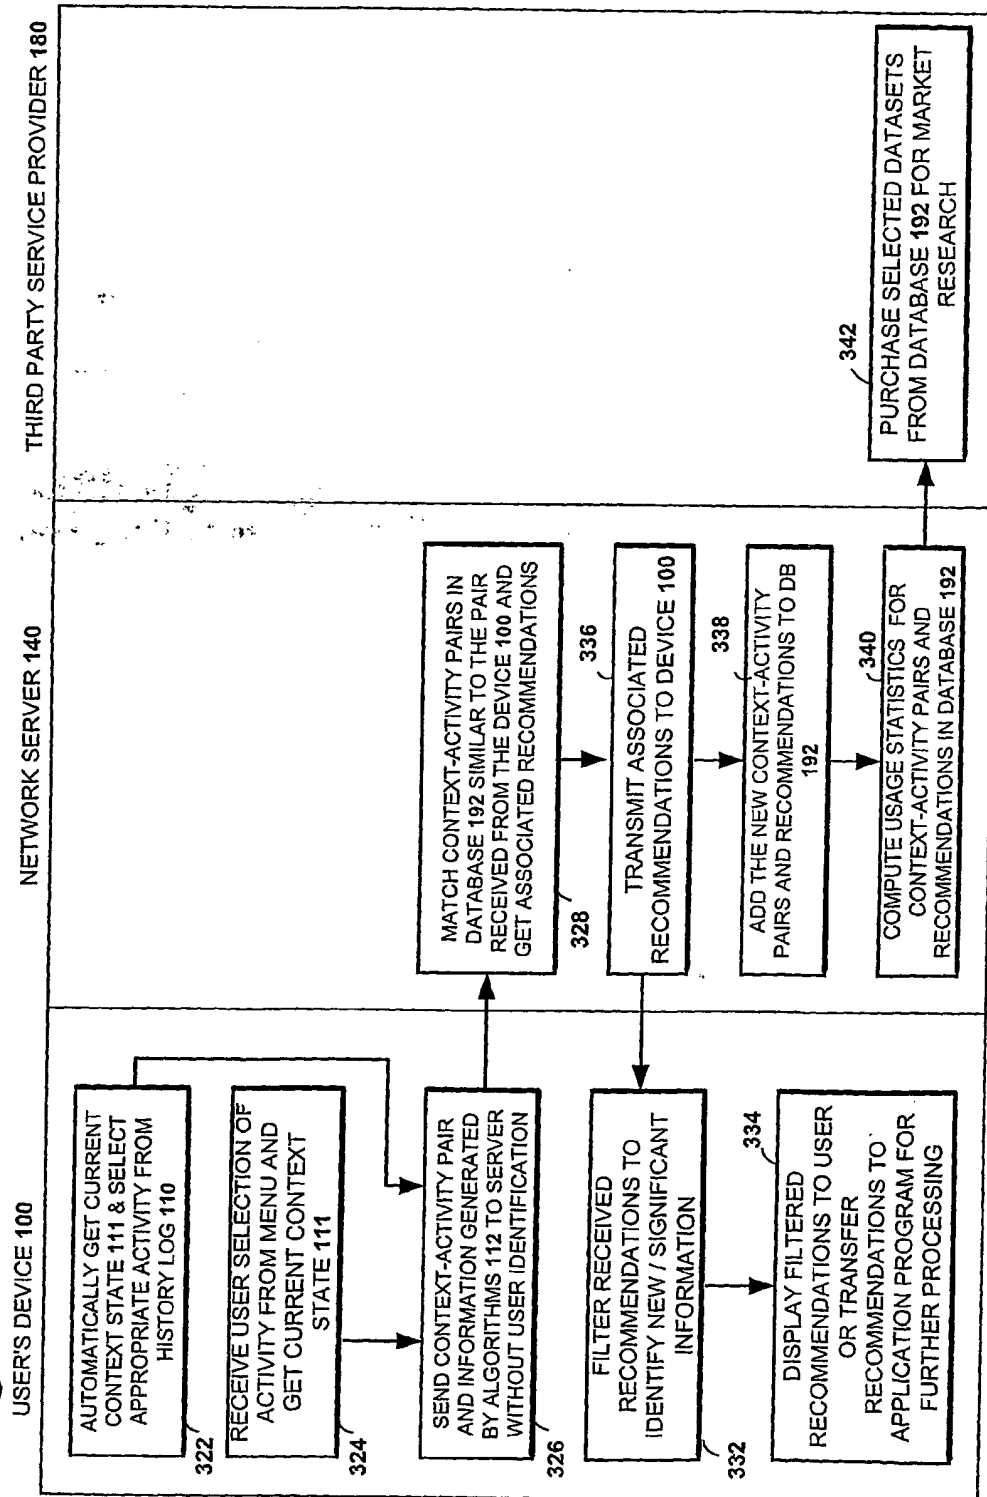
Figure 8A

Figure 8B

CONTEXT-ACTIVITY PAIRS AND SERVICES DATABASE 192 IN SERVER 140		
CONTEXT-ACTIVITY PAIRS	SERVICE RECOMMENDATIONS	NUMBER TIMES RECOMMENDED
ACTIVITY: DINING - restaurant CONTEXT: LOCAL TIME: 6:00 PM - 11:59 PM LOCATION: Beale St, Memphis TN LIGHT LEVEL: Night AMBIENT TEMPERATURE: 15 C - 25 C SPEED - ACCELERATION: 0 - 50 kph	Joe's Beef Barbecue Restaurant Elvis' Place The Blues Diner The Gourmet Restaurant Dan's Fast Food Restaurant	R=20 R=33 R=18 R=25 R=40
ACTIVITY: DINING - restaurant CONTEXT: LOCAL TIME: 5:00 AM - 10:59 AM LOCATION: Beale St, Memphis TN LIGHT LEVEL: Daylight AMBIENT TEMPERATURE: 15 C - 25 C SPEED - ACCELERATION: 0 - 50 kph	Pancake Restaurant Great Start Diner Betty's Homestyle Breakfast Mike's Quick Breakfast Dan's Fast Food Restaurant	R=120 R=100 R=130 R=150 R=120

Figure 8C

CONTEXT-ACTIVITY PAIRS AND SERVICE HISTORY LOG 110 IN DEVICE 100			RECEIVE BUFFER IN DEVICE 100
CONTEXT-ACTIVITY PAIR HISTORY	HISTORY OF SERVICES USED	RECOMMENDATIONS FROM SERVER	
ACTIVITY: DINING - restaurant CONTEXT: LOCAL TIME: 6:00 PM - 11:59 PM LOCATION: Beale St, Memphis TN LIGHT LEVEL: Night AMBIENT TEMPERATURE: 15 C - 25 C SPEED - ACCELERATION: 0 - 50 kph	The Gourmet Restaurant [USER'S RATING = 8] Dan's Fast Food Restaurant [USER'S RATING = 6]	Joe's Beef Barbecue Restaurant R=20 Elvis' Place R=33 The Blues Diner R=18 The Gourmet Restaurant R=25 Dan's Fast Food Restaurant R=40	
ACTIVITY: DINING - restaurant CONTEXT: LOCAL TIME: 5:00 AM - 10:59 AM LOCATION: Beale St, Memphis TN LIGHT LEVEL: Daylight AMBIENT TEMPERATURE: 15 C - 25 C SPEED - ACCELERATION: 0 - 50 kph	Mike's Quick Breakfasts [USER'S RATING = 8] Dan's Fast Food Restaurant [USER'S RATING = 5]	Pancake Restaurant R=120 Great Start Diner R=100 Betty's Homestyle Breakfast R=130 Mike's Quick Breakfasts R=150 Dan's Fast Food Restaurant R=120	

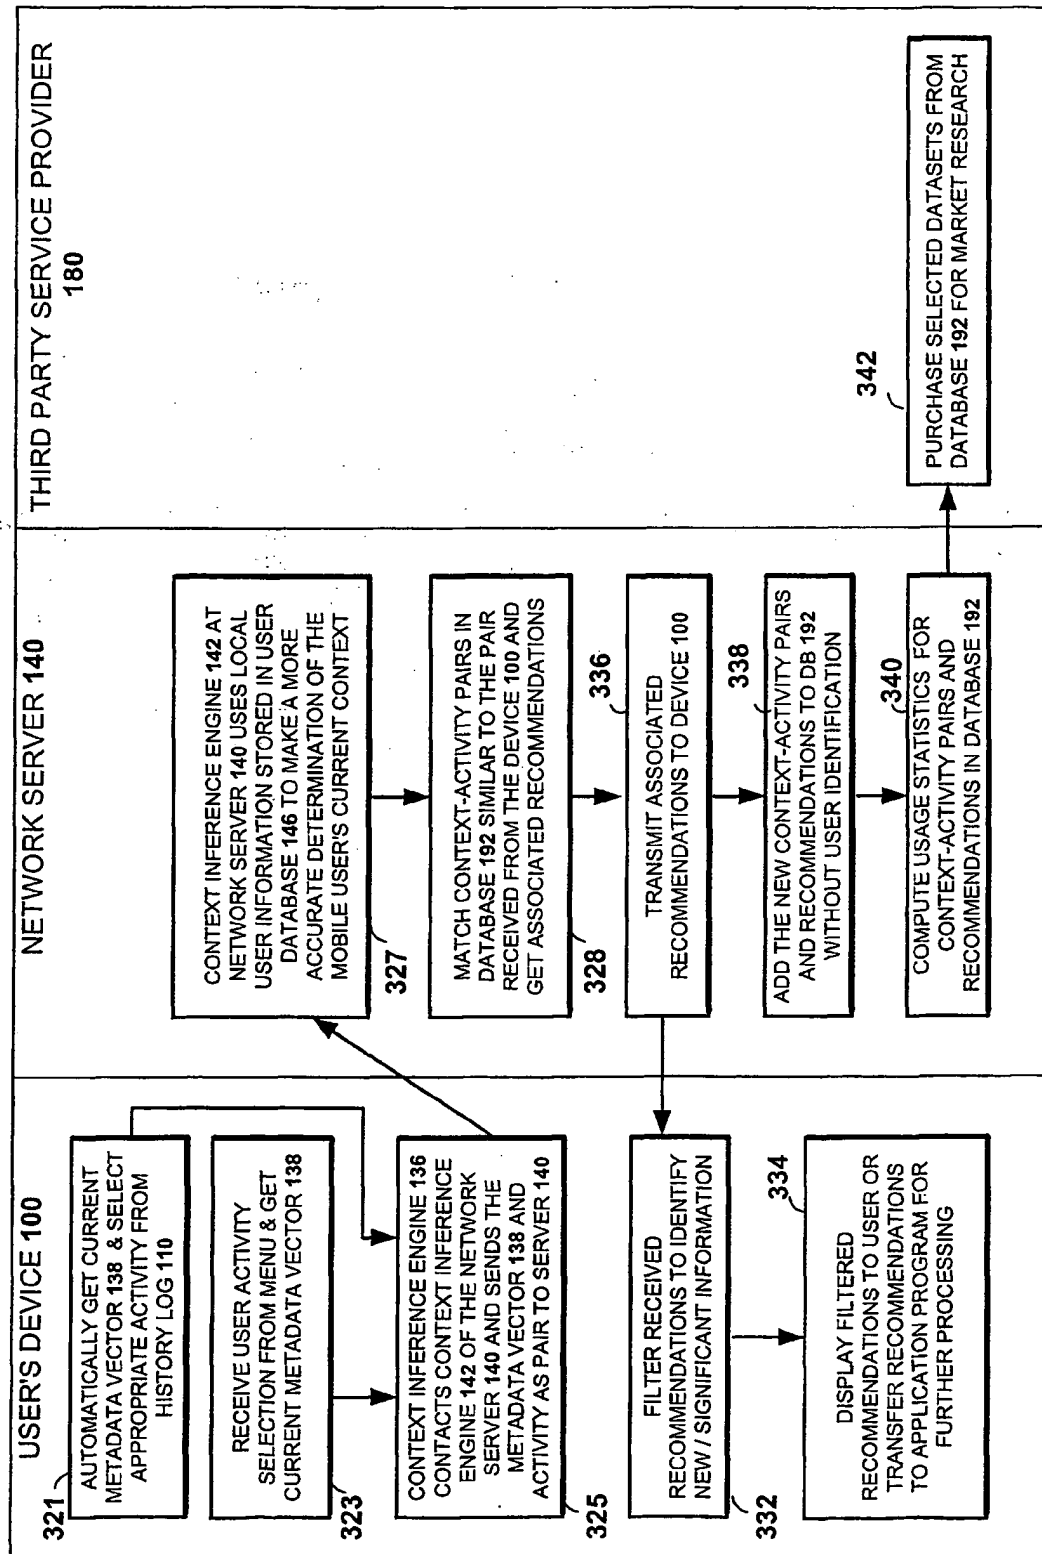
Figure 8D

Figure 8E

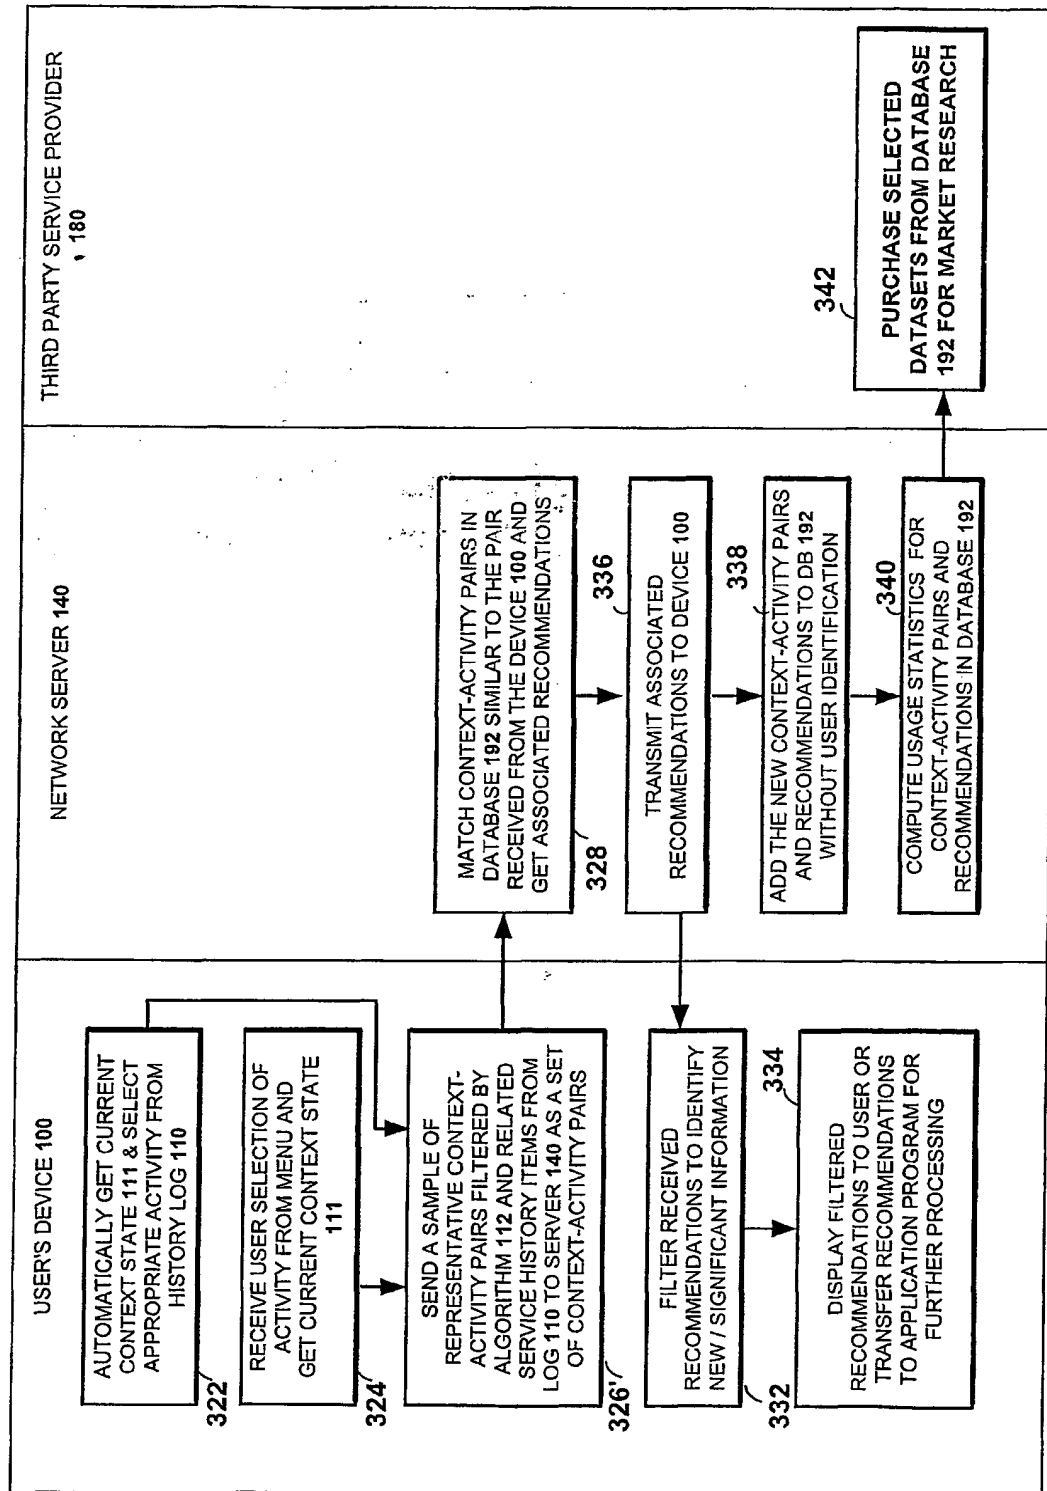
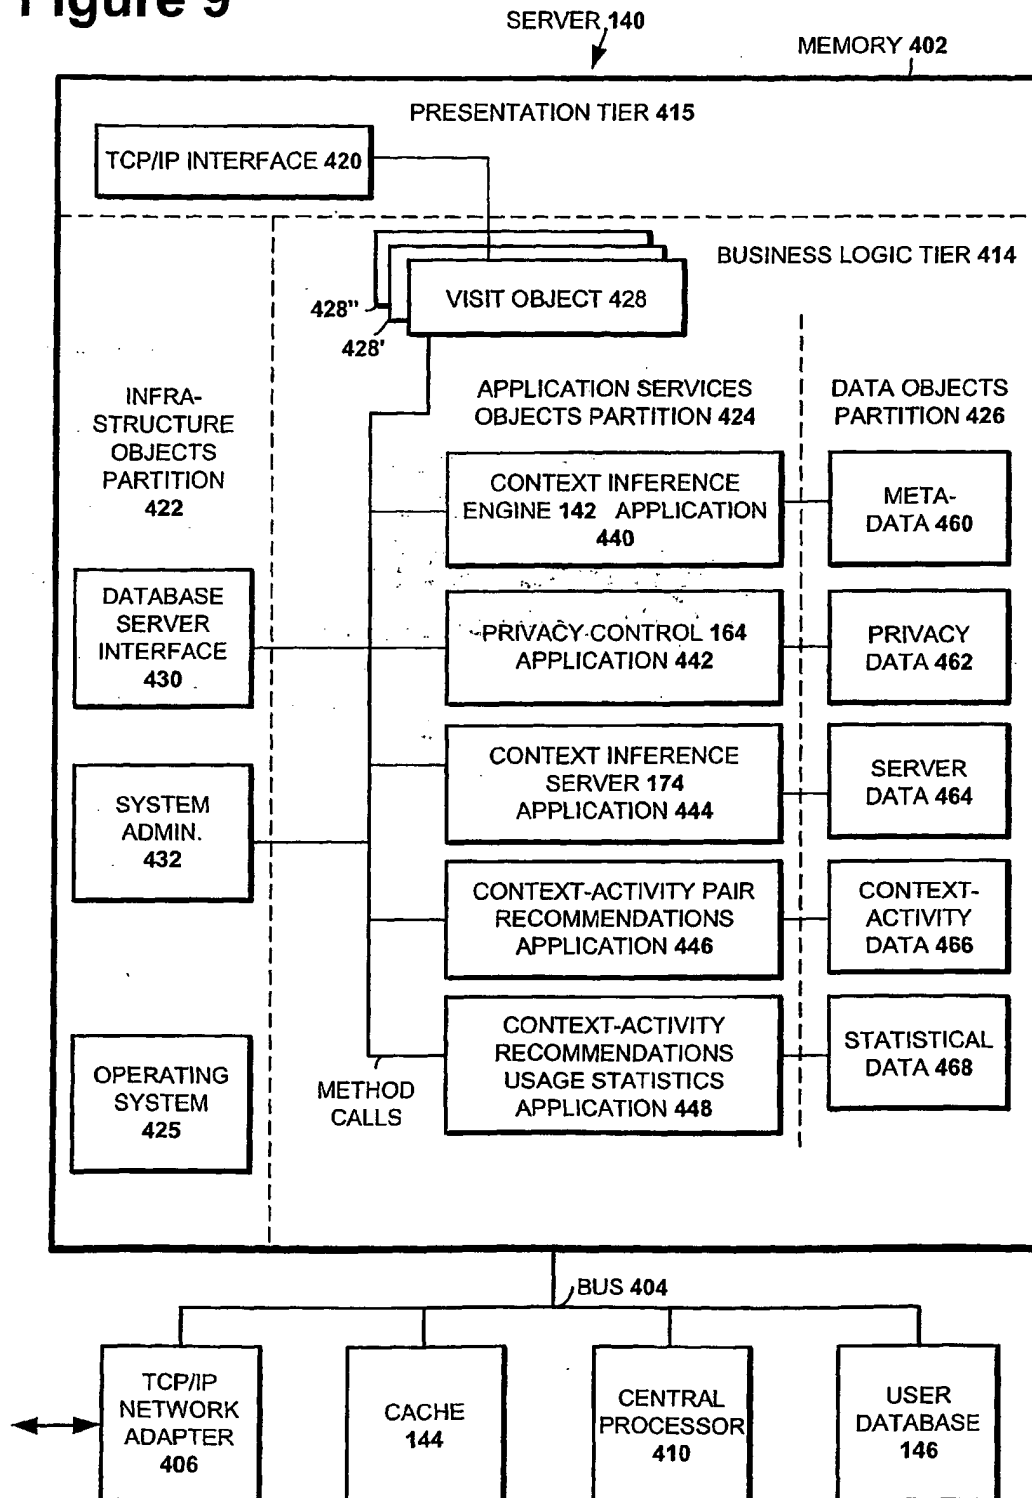
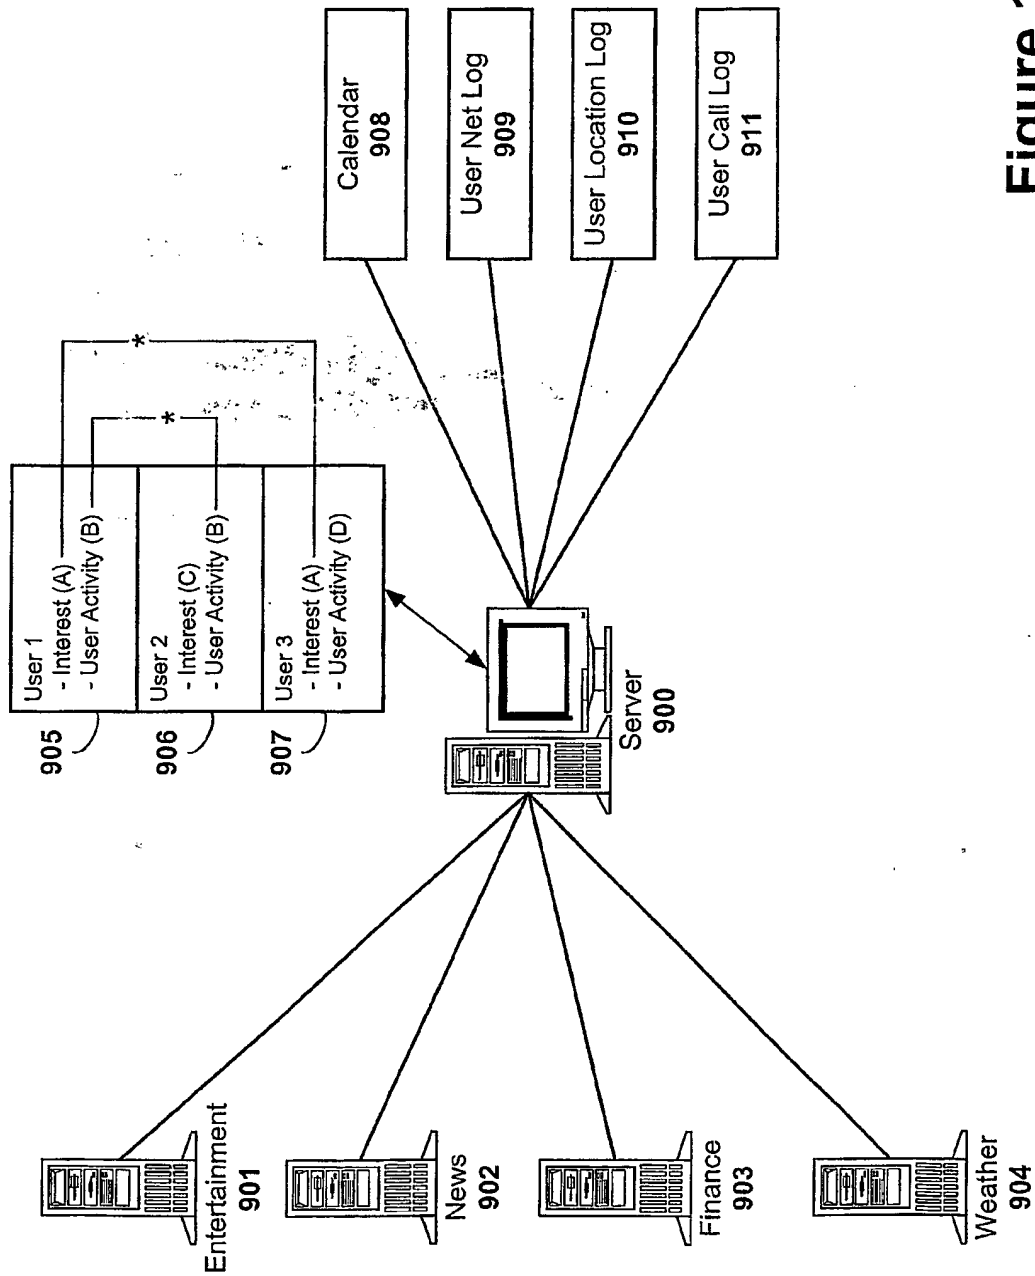


Figure 9



**Figure 10**



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

THIS PAGE BLANK (USPTO)